


Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP67.
2. Recommend Panel Thickness: 0.8 to 4.0 mm.
3. Recommend Torque: 24.0~25.0 Kgf-cm.

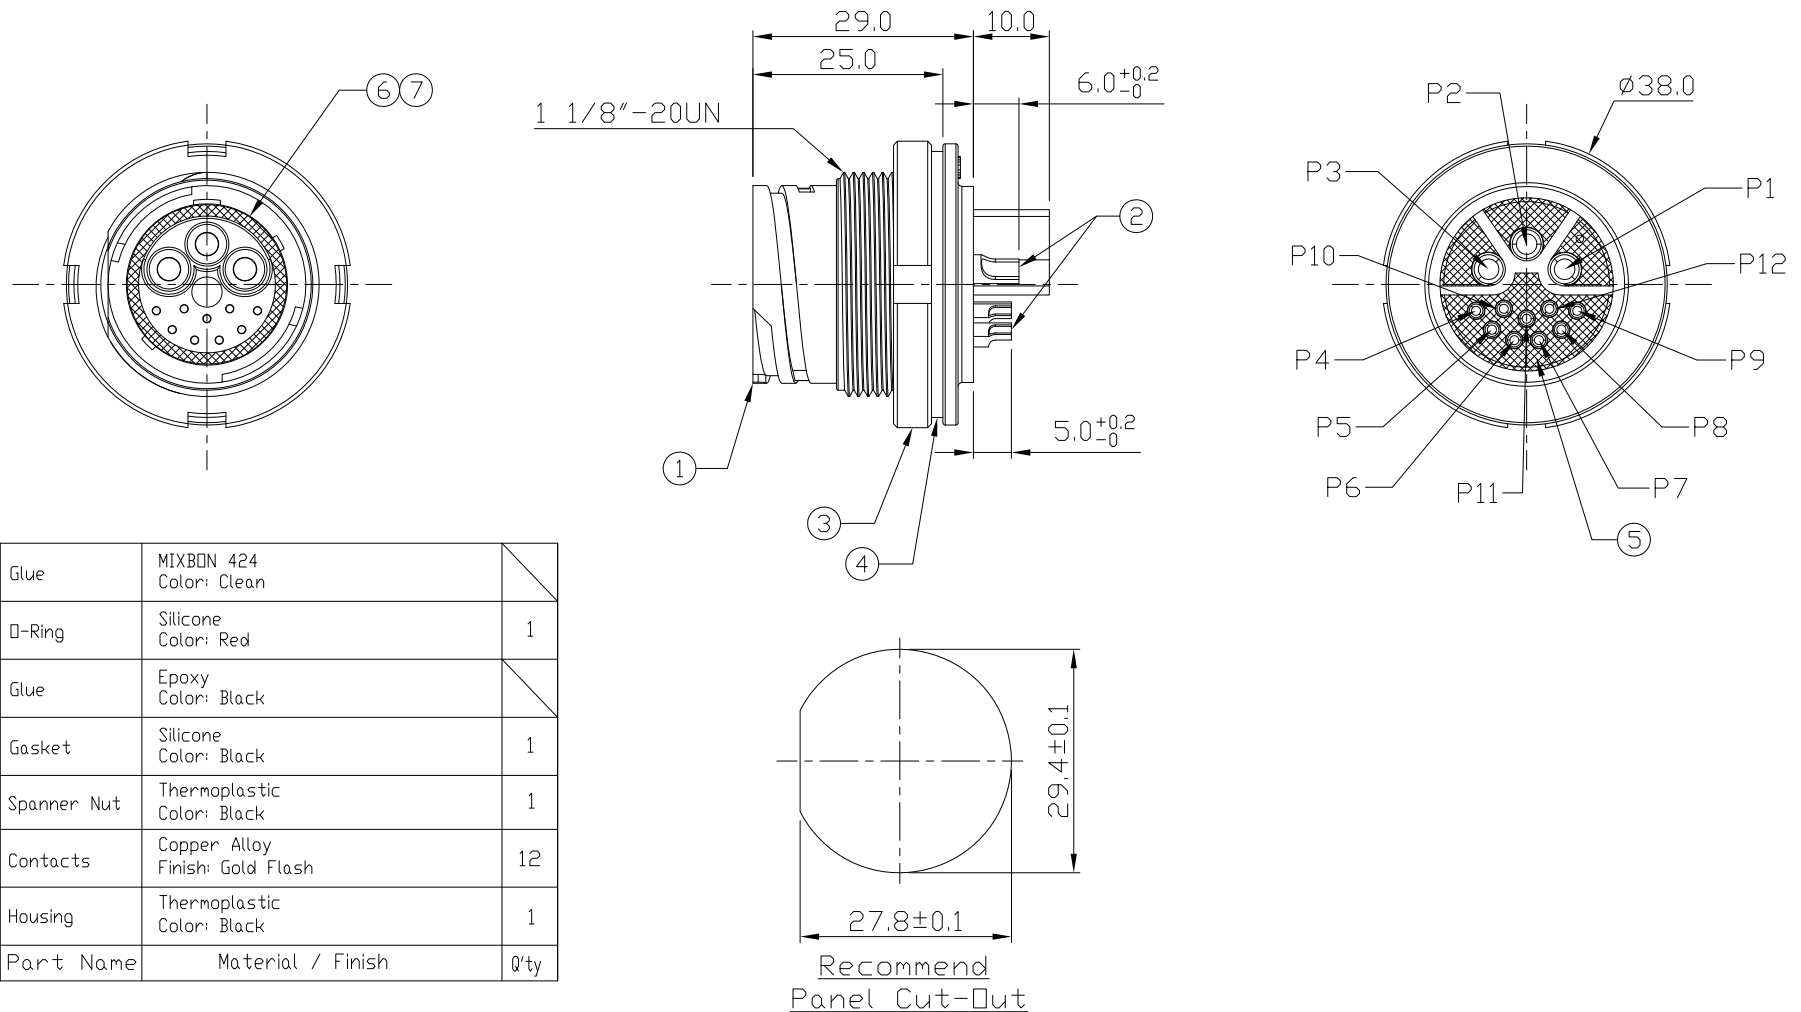

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X ±
.X ± 0.50
.XX ± 0.20
.XXX ± 0.05
ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

0908-PSPBBKN-12-LF

SERIES
MALE
NUT
BLACK
PANEL BACK
SOLDER
LEADFREE
12 WAY

DESCRIPTION: Hybrid C5 20A+5A 3P+9P Panel Male Solder Twist Lock