
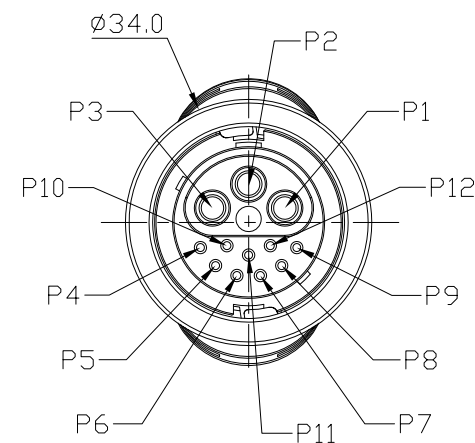


Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP67.
2. RoHS Compliant.

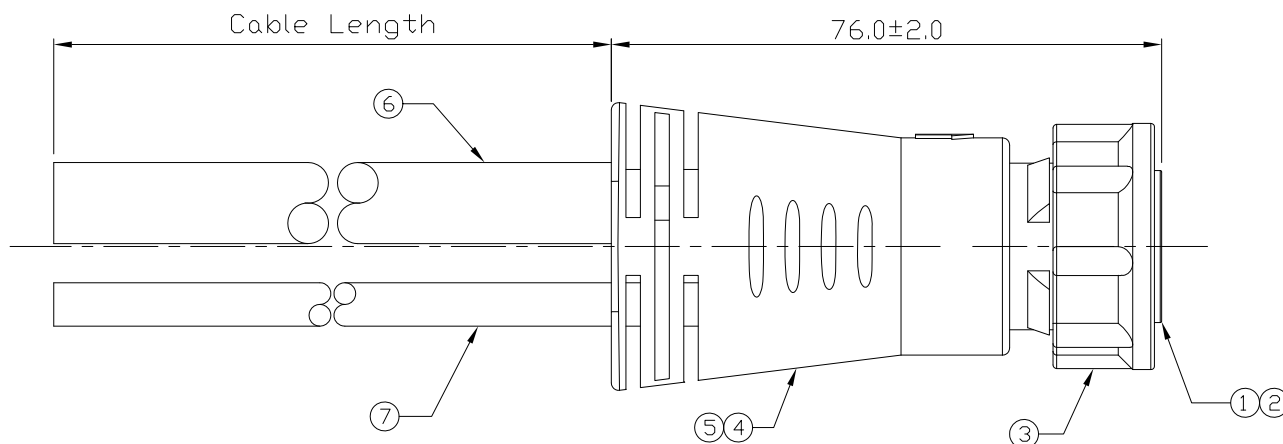

7	FTP CAT-5e	UL2835 24AWG*4P+MEA, $\text{OD}=6.0\text{mm}$ Color: Black	1
6	SJTW	SJTW 14AWG*3C, $\text{OD}=9.3\text{mm}$ Color: Black	1
5	Over Mold	PVC Color: Black	1
4	Inner Mold	Thermoplastic Color: White Or Black	1
3	Twist Lock Nut	Thermoplastic Color: Black	1
2	Contacts	Copper Alloy Finish: Gold Flash	12
1	Housing	Thermoplastic Color: Black	1
Item	Part Name	Material / Finish	Q'ty

SJTW	1	Black
	2	Green
	3	White
CAT-5e	4	Brown
	5	Brown/White
	6	Blue
	7	Blue/White
	8	Orange
	9	Orange/White
	10	Green
	11	Green/White
	12	Drain

10000 mm	± 500
9000 mm	± 450
8000 mm	± 400
7000 mm	± 350
6000 mm	± 300
5000 mm	± 250
4000 mm	± 200
3000 mm	± 150
2000 mm	± 100
1000 mm	± 50
900 mm	± 40
800 mm	± 40
700 mm	± 40
600 mm	± 40
500 mm	± 40
Cable Length	Tol.

Wiring Diagram

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, \pm
.X \pm 0.50
.XX \pm 0.20
.XXX \pm 0.05
ANG \pm 1°

PPOJECTION

照片框

ORDER INFORMATION

0908X1-12001424BKN-Fxxx-LF

SERIES

12 AWG

14/24 AWG

LEADFREE

50C:500mm

1MM:10000mm

FEMALE

NUT
BLACK

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: Hybrid C5 20A+5A 3P+9P Cable End Female Twist Lock