

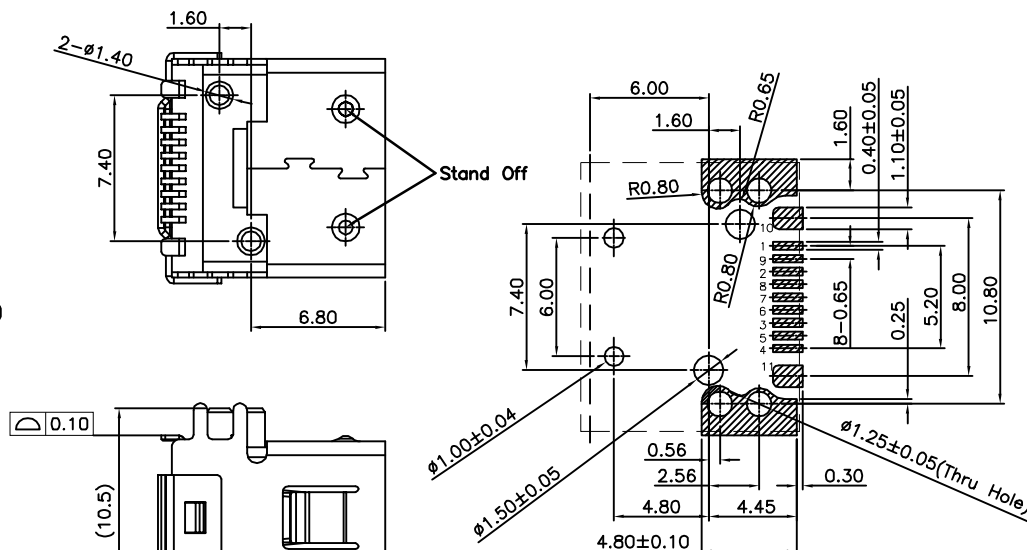

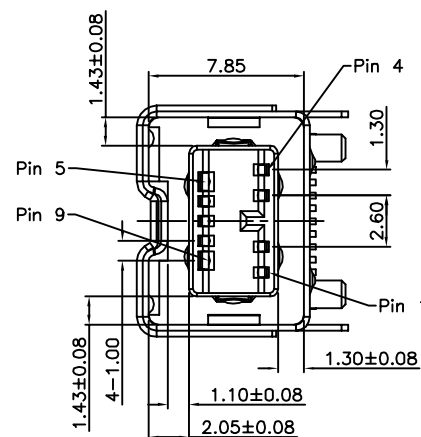


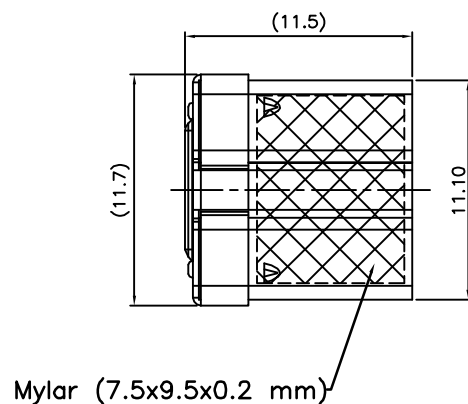

P.C.B Layout

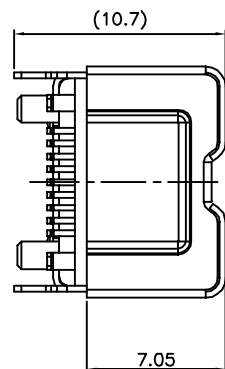


1. Material:

Housing: Thermoplastic, UL94V-0
Contact: Copper Alloy, Gold Flash Plated
Shell: Copper Alloy, Nickel Plated.

2. Specifications:

Voltage Rating: 30V
Current Rating: 1.5 Amps.
Contact Resistance: 50 mΩ Max.
Shell Resistance: 50 mΩ
Operation Temperature: -40°C~+85°C
Storage Temperature: -40°C~+105°C

3. The Clearance Between The Contact And PCB No More Than 0.10 mm

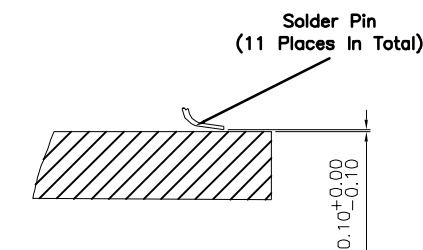

View Of Coplanarity

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.15
ANG ± 2°

PPOJECTION


照片框

ORDER INFORMATION

1394BI-SWM2P2CR-09-LF

SERIES
FEMALE
90°SMT
LEADFREE
09 WAY
REEL
MYLAR
POST
METAL FOOT

DESCRIPTION: 1394b Bilingual Socket Connector, (Dip, Dual Lugs), With Mylar

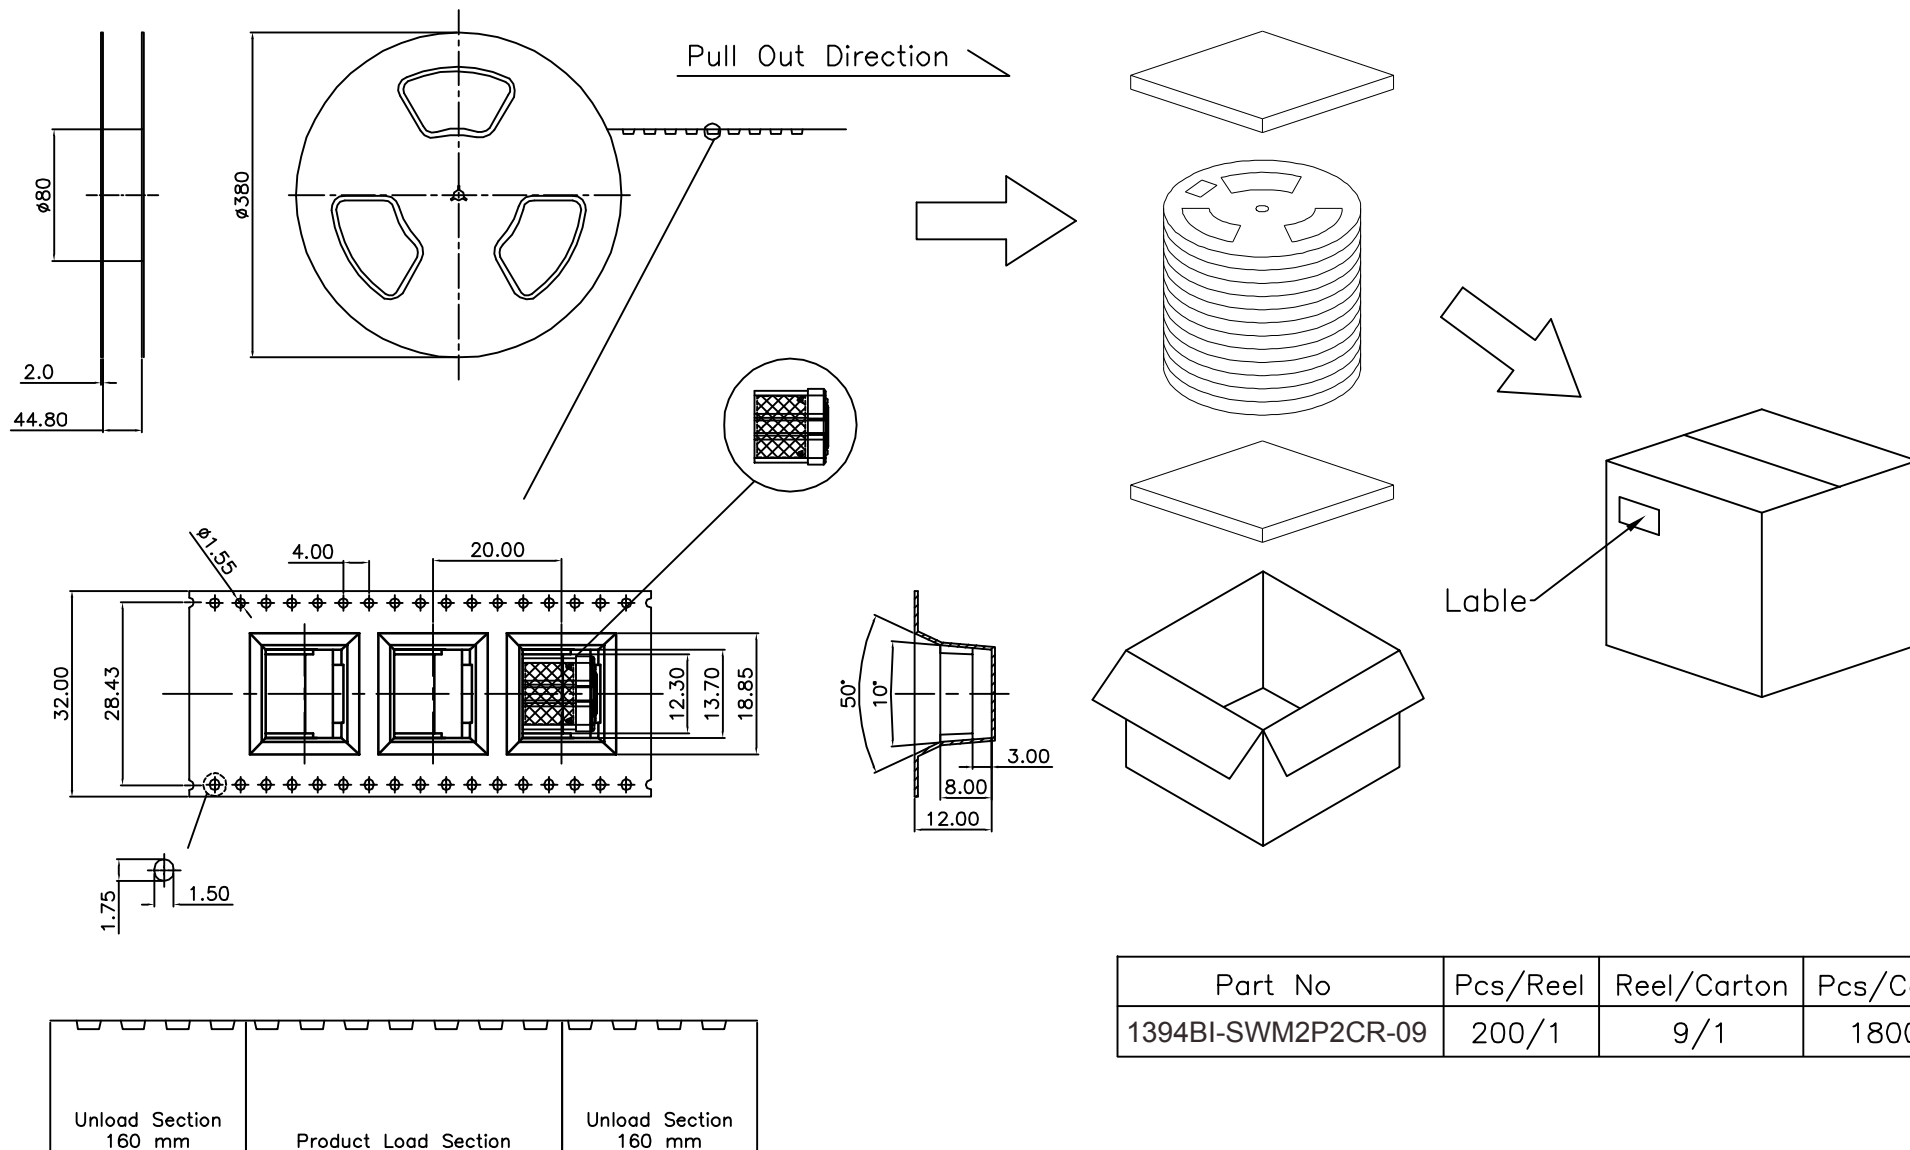

Part No	Pcs/Reel	Reel/Carton	Pcs/Carton
1394BI-SWM2P2CR-09	200/1	9/1	1800/1

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.15
ANG ± 2°

照片框

ORDER INFORMATION

1394BI-SWM2P2CR-09-LF

SERIES
FEMALE
90°SMT
LEADFREE
09 WAY
REEL
MYLAR
POST
METAL FOOT

DESCRIPTION: 1394b Bilingual Socket Connector, (Dip, Dual Lugs), With Mylar, Tape & Reel