
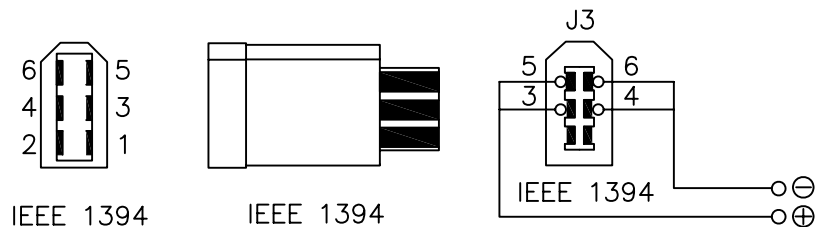


NOTES:

- 1.CONTACT FINISH: GOLD FLASH.
- 2.PE PREMOLDEO FOR P1 , P2.
- 3.CABLE:UL 26AWGX2C+1,SINGLE SHIELD (BRAID+AL-FOLL/MYLAR+DRAIN) PVC JACKET COLOR: WHITE OD: 5±0.3mm
- 4.ELECTRICAL TEST:
 (1) 100% OPEN SHORT AND MISSWIRE 7EST.
 (2) INSULATOR RESISTANCE:1M ohm.
 (3) WITHSTRANDED VOLTAGE:DC 500V/MINUTE.

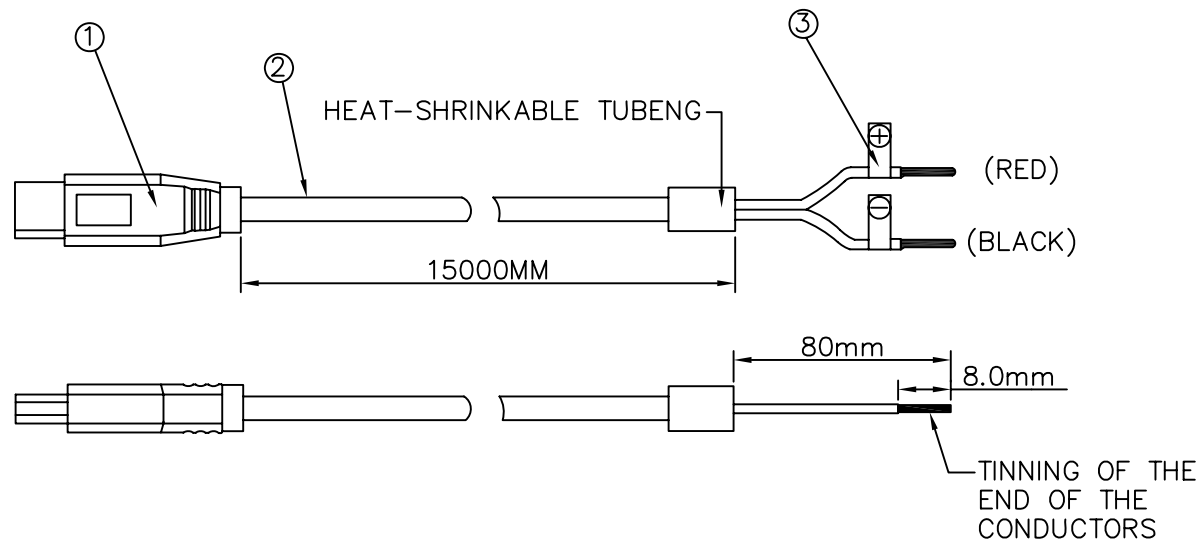

ITEM	DESCRIPTION	QTY	UNIT
1	IEEE 1394 PLUG MUST BE APPROVE BY UL	1	PCE
2	CABLE 26AWGX2C*1;MUST BE APPROVE BY UL	15000MM	MM
3	LABEL ; MUST BE APPROVE BY UL	2	PCE

1394X1-0600-MN1M5-LF
LEADFREE

RoHS Compliant



PART NO. 1394X1-0600-MN1M5		CHECKED BY CY		TOLERANCES ARE .X±0.2 .XX± .XXX± AWG	DESCRIP TION:			
DWG NO. 1394X1-0600-MN1M5		DRAWING BY						
FILE NO.		PROJECTION		AREA	REVISIONS	HK	DATE	

煜倫股份有限公司

UNIT / mm SCALE 1:1