


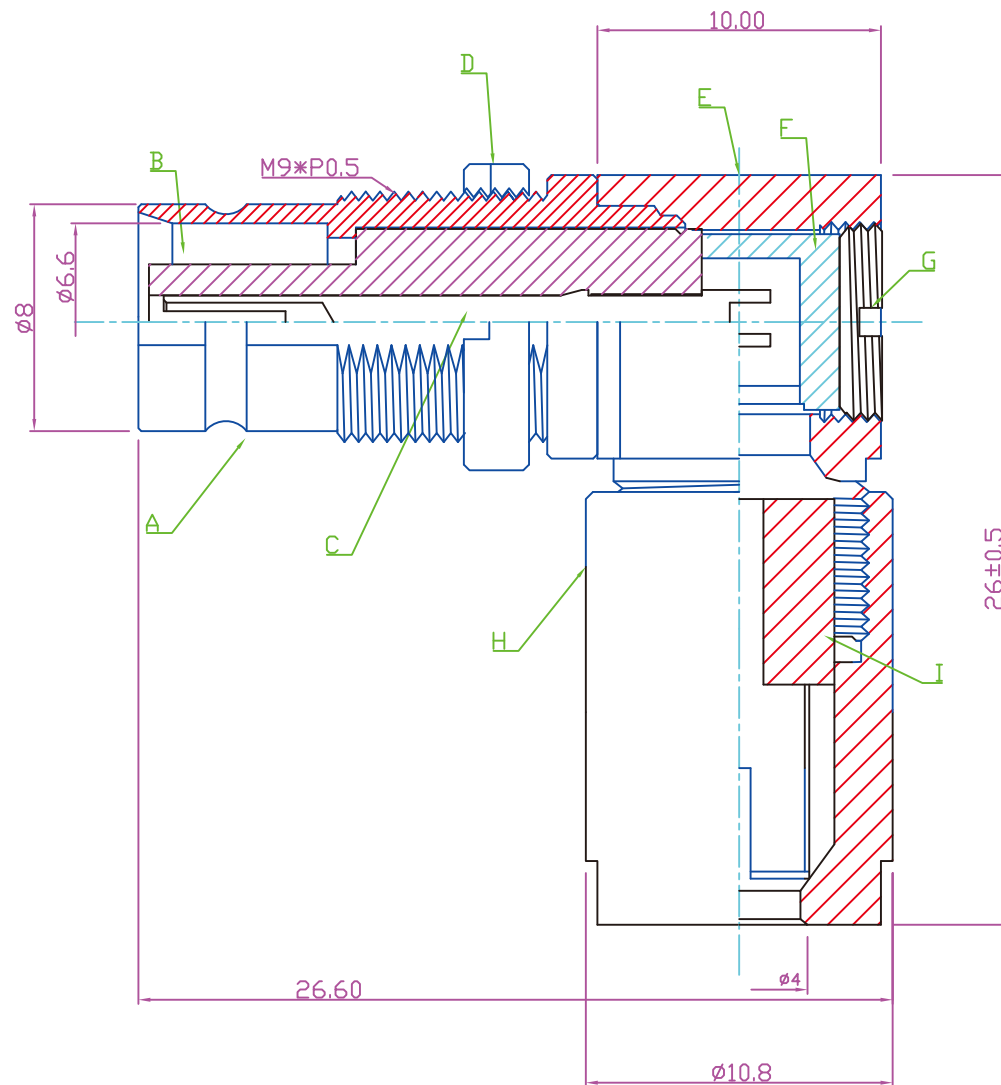

| NO. | Connectors construction | Materials specifications      | Mechanical specifications  |
|-----|-------------------------|-------------------------------|----------------------------|
| A   | body                    | brass gold plated             | Auto CNC                   |
| B   | insulator               | teflon                        | Auto CNC                   |
| C   | center pin              | phosphorus bronze gold plated | Auto CNC                   |
| D   | nut                     | brass gold plated             | Lathe                      |
| E   | body                    | brass nickel plated           | Auto CNC                   |
| F   | plastic cover           | PP, fireproof material        | Plastic injection machines |
| G   | screw                   | brass nickel plated           | Lathe                      |
| H   | middle cover            | brass nickel plated           | Auto CNC                   |
| I   | internal cover          | brass nickel plated           | Auto CNC                   |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ± 0.20

.XX ± 0.10

.XXX ± 0.05

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

1656-JSRPBN-179-LF  
SERIES JACK SOLDER  
NUT BACK PANEL  
LEADFREE  
RG 179  
90°

DESCRIPTION: