



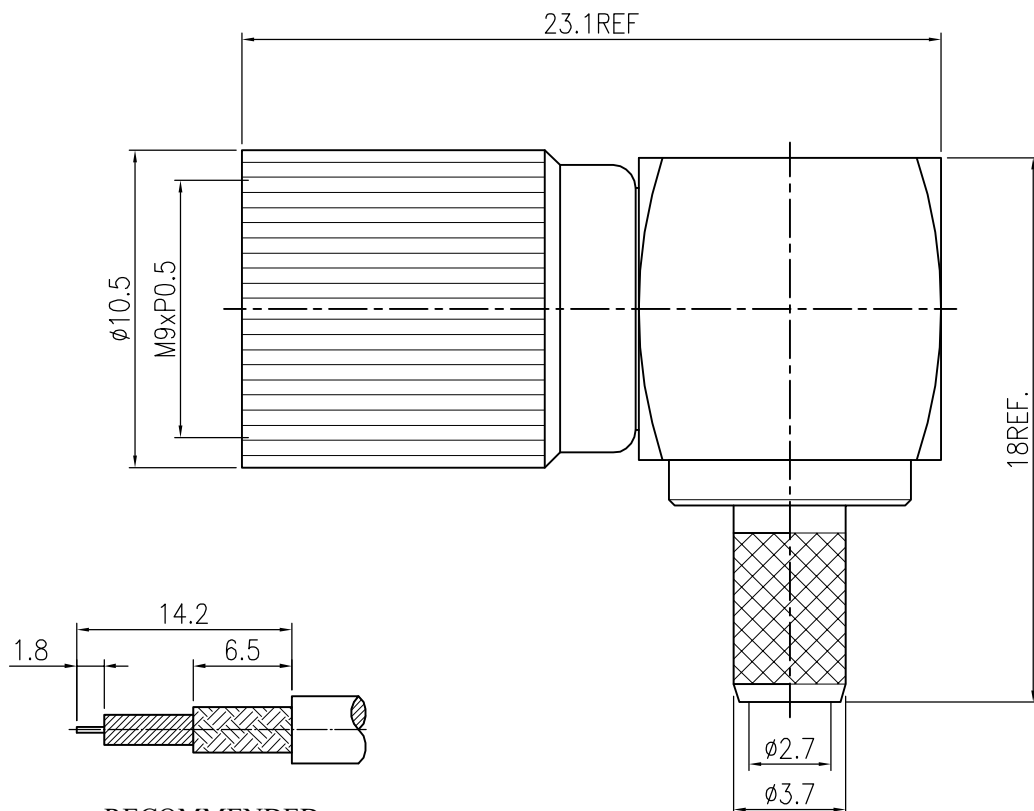


RECOMMENDED
CABLE STRIPPING DIM'S


8. Accessory Insulator

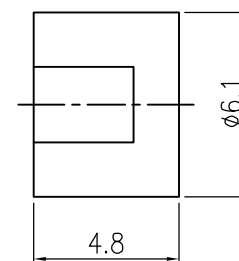

9. SCREW

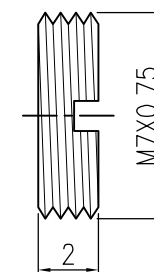

7. FERRULE

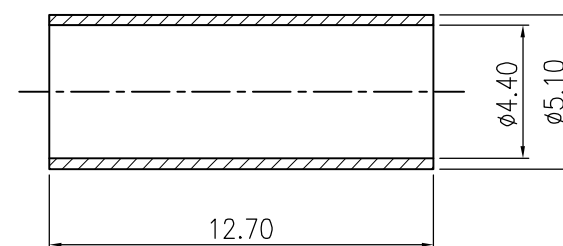

9	SCREW	BRASS	NICKEL	1
8	Accessory Insulator	DELIN	NONE	1
7	FERRULE	BRASS	NICKEL	1
6	SHELL	BRASS	NICKEL	1
5	CHASSIS	P.Bronze	GOLD	1
4	BARREL	BRASS	NICKEL	1
3	PIN	BRASS	GOLD	1
2	INSULATOR	TEFLON	NONE	1
1	BODY	BRASS	NICKEL	1
ITEM	DESCRIPTION	MATERIAL	FINISH	Q'TY

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

ANGLES = $\pm 3^\circ$
0.5~6 = ± 0.1
6~40 = ± 0.2
40~120 = ± 0.6
120~315 = ± 1.0
ABOVE 315 = ± 1.6

PPOJECTION

照片框

ORDER INFORMATION

1656-PCR-3002-LF

SERIES LEADFREE
90°
CRIMP
MALE
FOR BT 3002

DESCRIPTION: 1.6/5.6 R/A Male Crimp For BT 3002