


8.	Shell	Stainless Steel	1	Passivate
7.	Retaining Ring	Bronze	1	None
6.	Nut	Stainless Steel	1	Nickel
5.	Sleeve	Brass	1	Gold
4.	Insulation	PEI	1	None
3.	Pin	Brass	1	Gold
2.	Body	Stainless Steel	1	Passivate
1.	Body	Stainless Steel	1	Passivate
NO.	DESCRIPTION	MATERIAL	Q' TY	FINISH

Electrical Characteristics	
Impedance	50 Ω
Frequency Range	0 ~ 40 GHz
V.S.W.R.	< 1.25
No. of Matings (Typical)	500
Temperature Range	-40°C to +85°C

RoHS Compliant

TOLERANCES ARE

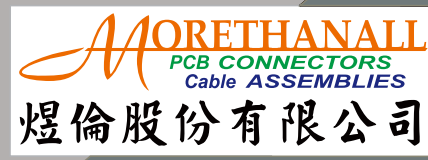

DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1 : 1
 DATE

X. ±
 .X ± 0.20
 .XX ± 0.10
 .XXX ± 0.05
 ANG ± 0.5°



ORDER INFORMATION

292-PS-405-LF
 SERIES | LEADFREE
 | RG405
 | SOLDER
 | MALE

www.morethanall.com

SIZE A4 PPROJECTION

DESCRIPTION: For Cable Semi-rigid .085 (RG405)