
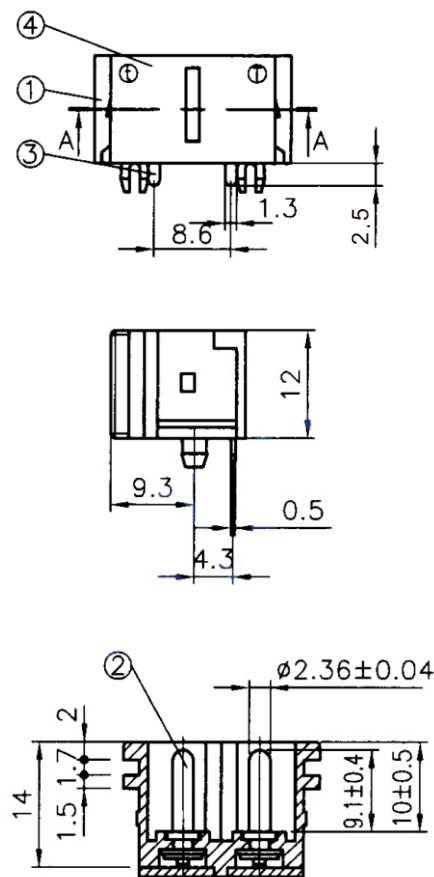


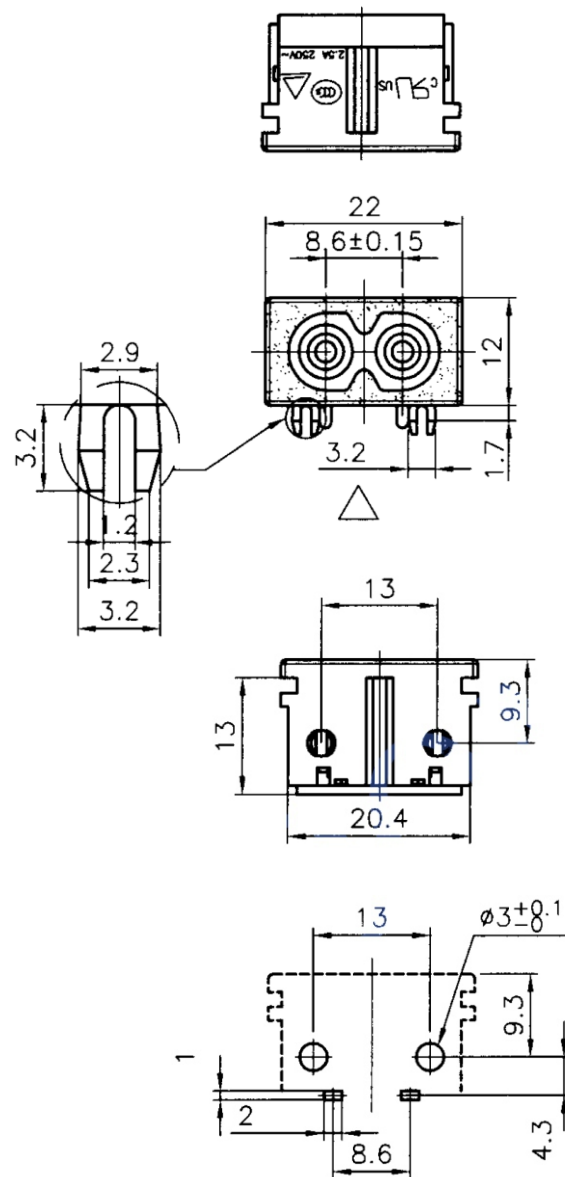

SECTION A-A

Rating: 2.5A 250V AC
Approvals: UL&cUL/TUV/CCC

4	Cover back of the Body	1
3	Soldering PIN Brass Strip t=0.5mm Tin-Plated	2
2	Solid Contact PIN Brass Strip d=Ø2.36mm Ni-Plated	2
1	Body Insulator PBT Black Color	1

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

ACC-PRPCR43-02-LF
SERIES T T T T LEADFREE
02 WAY
ROW PITCH 4.3mm
C TYPE
MALE PANEL
DIP 90°

DESCRIPTION: