

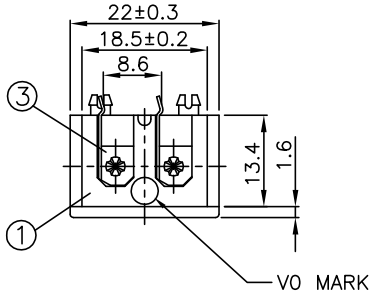


Rating:2.5A 250V AC
Approvals:UL/CSA/VDE/NEMKO
/CCC/KTL

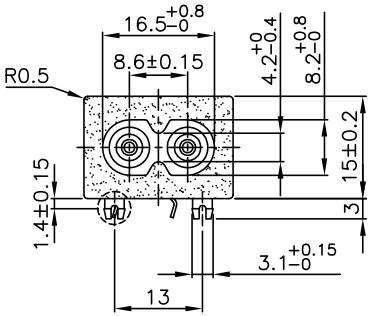













PCB LAYOUT

| | | |
|---|---|---|
| 3 | Soldering PIN Brass Strip t=0.4mm Tin-Plated (Matte Tin) | 2 |
| 2 | Solid Contact PIN Brass Strip d=ø2.36mm Ni-Plated | 2 |
| 1 | Body Insulator PC | 1 |

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

| | | |
|---|---|---|
| DRAWING BY CY | | TOLERANCES ARE |
| CHECKED BY GENIUS | | X. ± 0.30<br>.X ± 0.20<br>.XX ± 0.10<br>.XXX ±<br>ANG ± 1° |
| UNIT / mm | SCALE 1 : 1 | |
| DATE | | |
| SIZE A4 | PPOJECTION | |

照片框

ORDER INFORMATION

ACC-PRPCR65-02-LF

SERIES
MALE
PANEL
DIP 90°
C TYPE
ROW PITCH 6.5mm
02 WAY
LEADFREE

DESCRIPTION: