

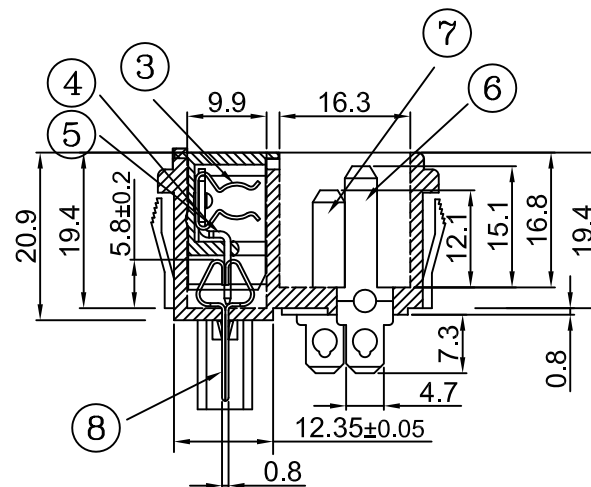


Specifications:

1. Rating: 10A/250VAC
2. Insulation Resistance: DC 500V/100M Ω (min)
3. Dielectric Strength: 2000VAC/1Minute
4. Housing Material: Nylon#66 UL 94V2
5. Safety Approval:

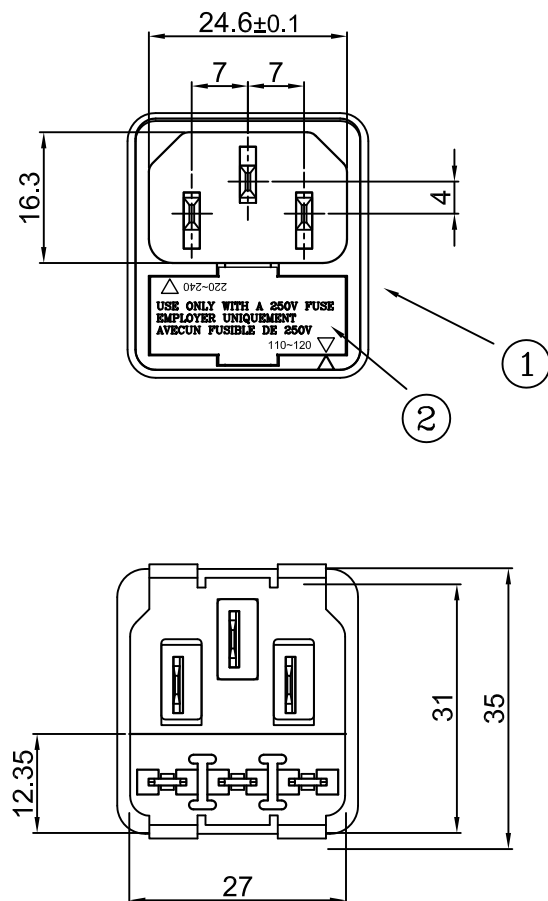

8	接觸端子	3	BSP1-1/2H	t=0.8	Sn-Plated
7	邊端子	2	BSP1-1/2H	t=2.0	Sn-Plated
6	中端子	1	BSP1-1/2H	t=2.0	Sn-Plated
5	連接端子(左)	1	BSP1-1/2H	t=0.8	Sn-Plated
4	連接端子(右)	1	BSP1-1/2H	t=0.8	Sn-Plated
3	保險絲夾片	2	磷銅	t=0.5	Sn-Plated
2	保險絲蓋	1	Nylon#66	UL 94V2	
1	外殼	1	Nylon#66	UL 94V2	
編號	零件名稱	數量	材質	規格	加工處理

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±

UNIT / mm

SCALE 1:1

.XX±

DATE

.XXX±

ANG±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

ACF-PQ4FSPA-03VH-LF
SERIES | T | T | T | T | LEADFREE
MALE | | | | | HORIZONTAL
TAB 4.8mm | | | | | VERTICAL TERMINAL
03WAY
FUSE | | | | | PANEL FRONT

DESCRIPTION: