
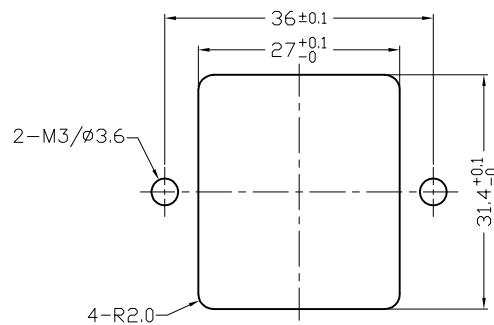
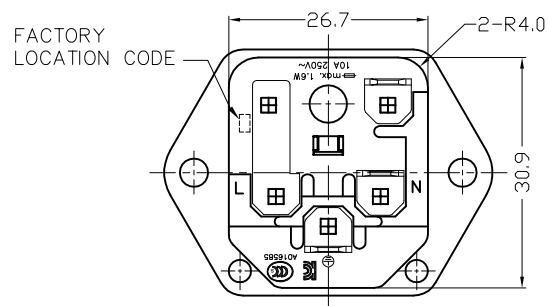
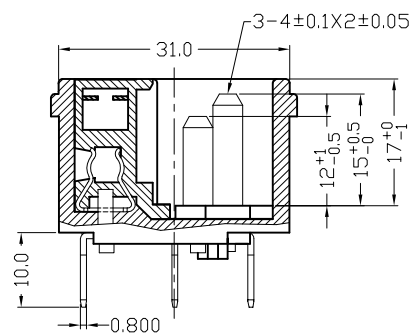
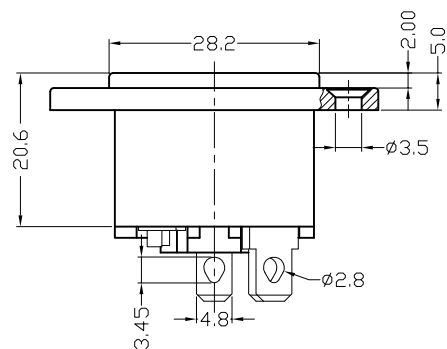


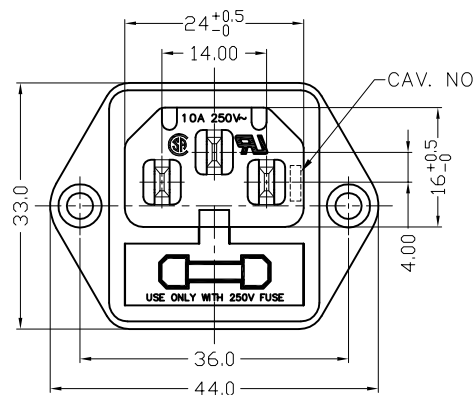

PANEL CUT-OUT

SPECIFICATION

A: MATERIAL:

1. HOUSING: NYLON 66 FLAMMABILITY, UL 94V-0
2. TERMINAL: COPPER ALLOY, TIN PLATED

B: CHARACTERISTICS:

1. RATING: 10A 250V~ NORTH AMERICA & EUROPE
2. INSULATION RESISTANCE: 100 MΩ MIN, AT 500 VDC
3. ELECTRIC STRENGTH: AC 2,000 V FOR 1 MINUTE

C: APPROVALS:

UL, CSA, TUV, KC & CCC

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 3°

照片框

ORDER INFORMATION

ACF-PQ4FSPE-03H-LF
SERIES | T | T | T | T | LEADFREE
MALE | | | | HORIZONTAL
TAB 4.8mm | | | | 03WAY
| | | | EAR
| | | | PANEL
| | | | FUSE

DESCRIPTION: AC INLET 3P+FUSE HOLDE (SCREW-ON)