

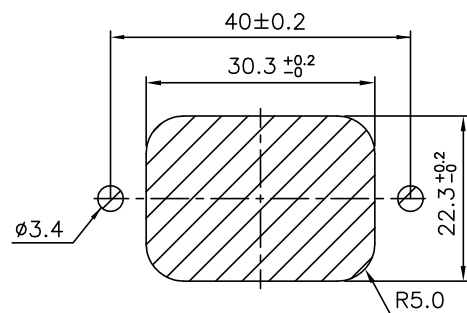
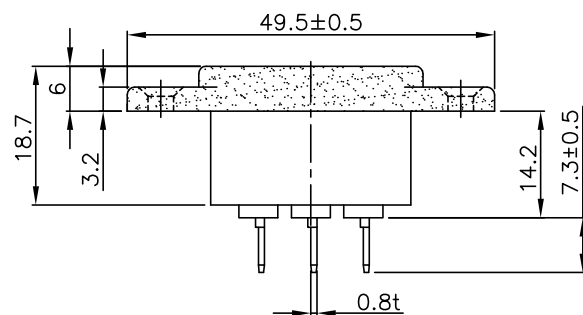
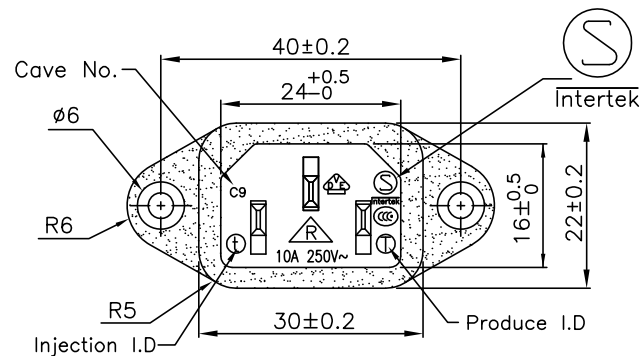
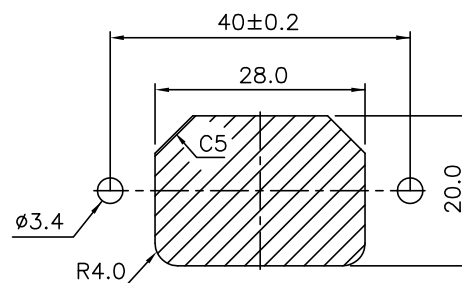


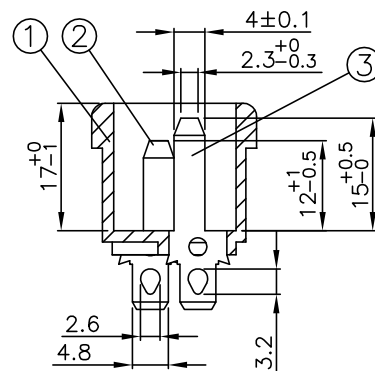

Mounting inlet flange at back of cover.

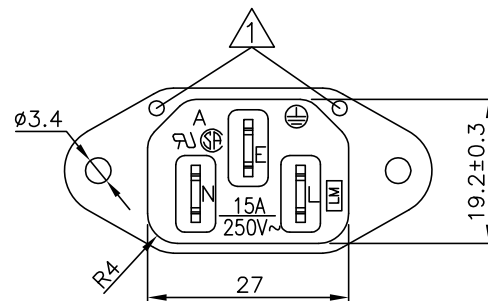

Mounting inlet flange in front of cover.

Rating: 15A 250V AC
 Approvals:UL/CSA
 Rating: 10A 250V AC
 Approvals:VDE/SEMKO/CCC

3	Soldering PIN Brass Strip t=2mm	1
2	Contact PIN Brass Strip t=2mm	2
1	Body Insulator PBT Black Color	1

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

DATE

SIZE A4

SCALE 1 : 1

X, ± 0.40

.X, ± 0.30

.XX, ± 0.10

.XXX, ±

ANG ± 1°

PPOJECTION



ORDER INFORMATION

ACF-PQ4PE-03-LF
 SERIES T T T LEADFREE
 03 WAY
 EAR
 PANEL
 4.8mmTAB
 MALE

DESCRIPTION: