

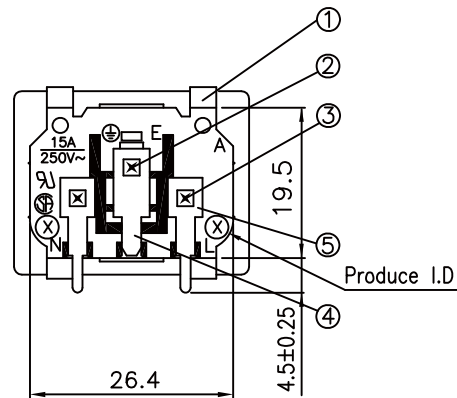
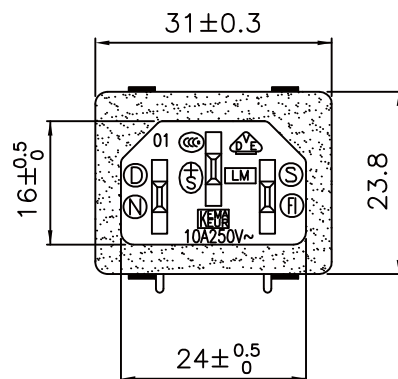






Rating:15A 250V AC  
 Approvals:UL/CSA  
 Rating:10A 250V AC  
 Approvals:VDE/KEMA/SEV  
 DEMKO/NEMKO  
 SEMKO/FIMKO/CCC

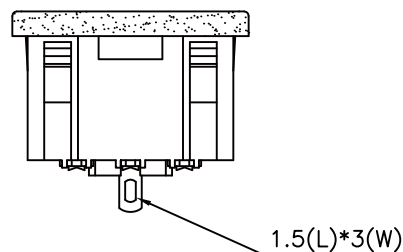

|   |                                              |   |
|---|----------------------------------------------|---|
| 5 | Soldering PIN Brass Strip t=0.8mm Tin-Plated | 2 |
| 4 | Soldering PIN Brass Strip t=0.8mm Tin-Plated | 1 |
| 3 | Contact PIN Brass Strip t=2mm Ni-Plated      | 2 |
| 2 | Contact PIN Brass Strip t=2mm Ni-Plated      | 1 |
| 1 | Body Insulator NYLON Color Black             | 1 |

PANEL CUTOUT  
 THICKNESS 0.8mm~1.5mm

P.C.B. LAYOUT

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±  
 .X ±  
 .XX ±  
 .XXX ±  
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

ACF-PRPAEM-03-LF

SERIES  
 LEADFREE  
 03WAY  
 EMPTY 2  
 PANEL FRONT  
 DIP 90°  
 MALE

DESCRIPTION: