

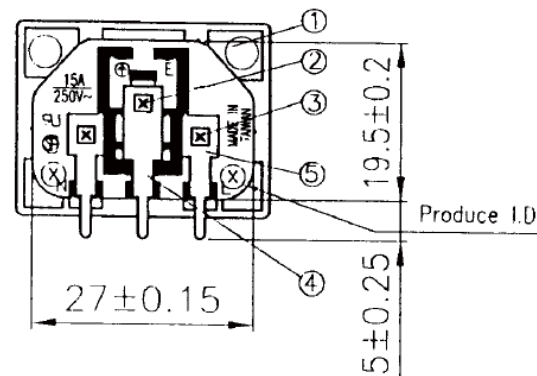
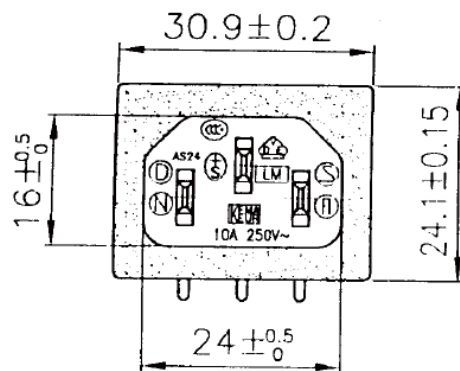





Rating: 15A 250V AC
 Approvals: UL/CSA
 Rating: 10A 250V AC
 Approvals: VDE/KEMA/SEV
 DEMKO/NEMKO
 SEMKO/FIMKO/CCC

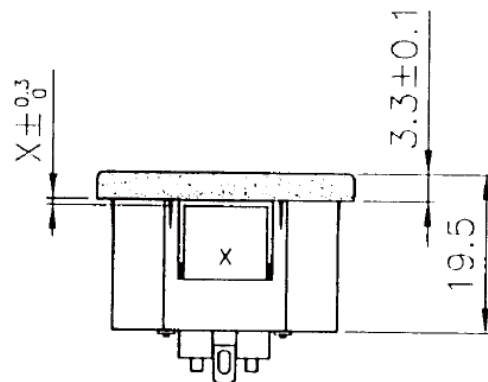


PART LIST

Part No.	X	Color
ACF-PRPA08-03	0.8	Black
ACF-PRPA10-03	1.0	Black
ACF-PRPA12-03	1.2	Black
ACF-PRPA15-03	1.5	Black
ACF-PRPA20-03	2.0	Black
ACF-PRPA30-03	3.0	Black

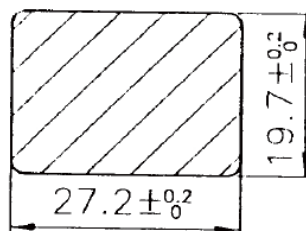

PANEL CUTOUT
THICKNESS X mm



P.C.B. LAYOUT

5	Soldering PIN Brass Strip t=0.8mm Tin-Plated	2
4	Soldering PIN Brass Strip t=0.8mm Tin-Plated	1
3	Contact PIN Brass Strip t=2mm Ni-Plated	2
2	Contact PIN Brass Strip t=2mm Ni-Plated	1
1	Body Insulator PC OR PBT Black Color	1

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm

SCALE 1:1


DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION



ORDER INFORMATION

ACF-PRPAxx-03-LF
 SERIES | | | LEADFREE
 | | | 03WAY
 | | | 08:0.8mm
 | | | 30:3.0mm
 MALE | | | PANEL FRONT
 | | | DIP 90°

DESCRIPTION: