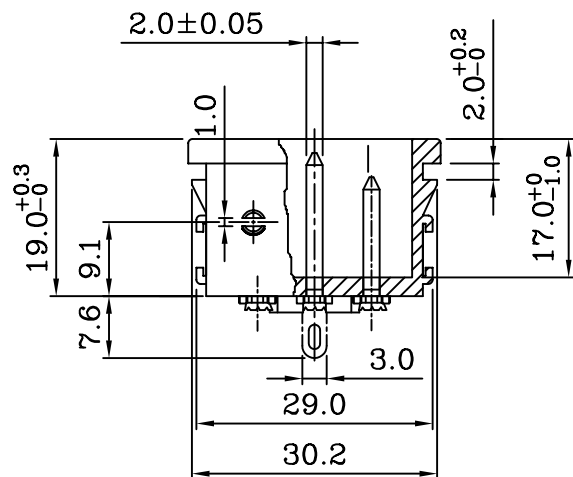

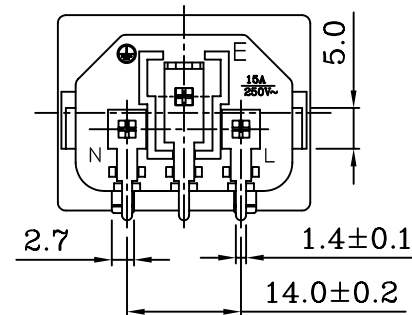
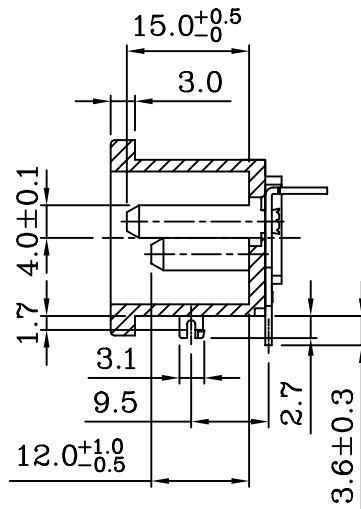
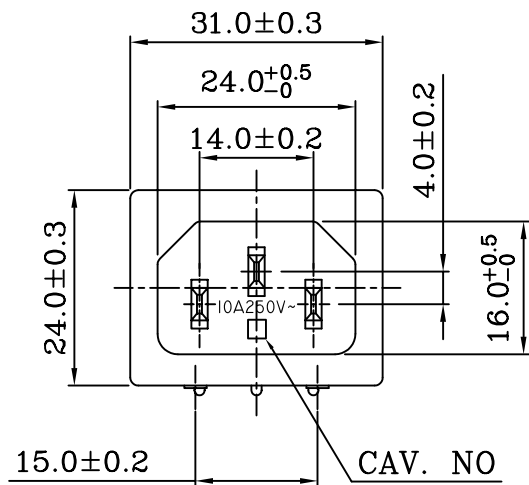


PCB LAYOUT

SPECIFICATION:

1. INSULATION RESISTANCE: OVER 100MΩ 500V DC.
2. DIELECTRIC STRENGTH: 2000V AC ONE MINUTE.
3. Body Materil: Black Glass-Filled Thermoplastic . UL 94V~0

Rating:AC 15A 250V	
Mark	Safety Regulation
cULus	cULus
Rating:AC 10A 250V	
Mark	Safety Regulation
	VDE
	CCC
	ENEC

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

ACF-PRPPA20-03-LF
SERIES | | | | LEADFREE
| | | | 03WAY
| | | | 2.0mm
MALE | POST | PANEL FRONT
DIP 90°

DESCRIPTION: