
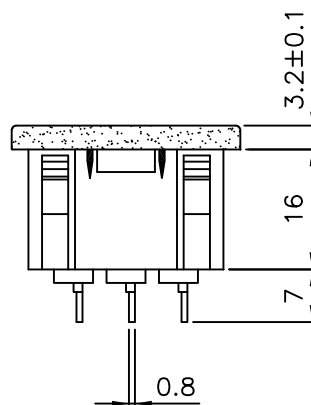

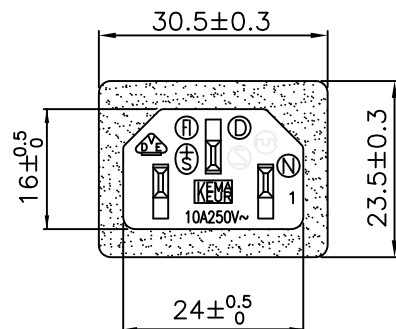


PANEL CUTOUT THICKNESS 0.8mm~1.5mm

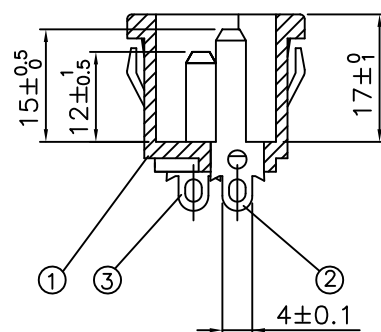

- 1 Body Insulator Nylon A216-BK
- 2 Contact PIN Bronze Strip t=2mm Tin-Plated
- 3 Contact PIN Bronze Strip t=2mm Tin-Plated

|         |                   |
|---------|-------------------|
| 10A/15A | 250V AC           |
| UL      | NO: E102641       |
| CSA     | NO: LR 65612      |
| VDE     | NO: 62435         |
| SEV     | NO: 98,5 50908,01 |
| FIMKO   | NO: 173790-01     |
| DEMKO   | NO: 103171        |
| KEMA    | NO: 9 16468       |
| NEMKO   | NO: L 85771       |
| SEMKO   | NO: 9125148       |

| 一般公差    |      |
|---------|------|
| 尺寸範圍    | 容許公差 |
| 0~10    | ±0.3 |
| 10~100  | ±0.5 |
| 100~150 | ±0.8 |
| 150~250 | ±1   |

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±

PPOJECTION



ORDER INFORMATION

ACF-PS4PA-03-LF

SERIES

LEADFREE

03 WAY

PANEL FRONT

4.0mm SOLDER

MALE

DESCRIPTION: