

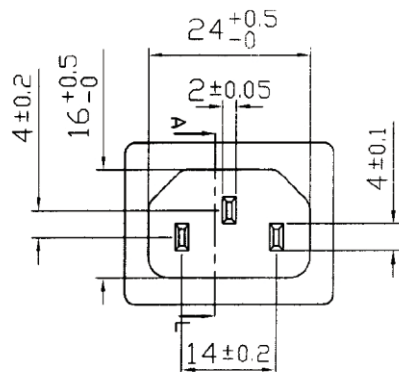


SECTION. AL

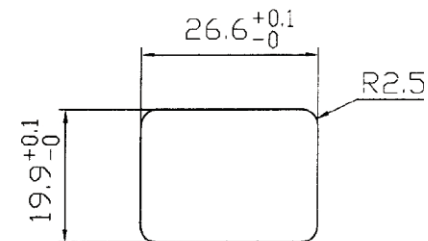

PANEL CUT-OUT

10A/15A 250V~

1. SOLDERING: PIN BRASS STRIP 0.8X3T TIN PLATING
2. CONTACT: PIN BRASS STRIP 2X4 TIN PLATING
3. BODY INSULATOR: NYLON 66

物質名稱	限值	測試方法
Pb(鉛)	<50PPM	IEC62321, IEC111, IECmethod, section11, 120r13
Ca(鎘)	<5PPM	IEC62321, IEC111, IECmethod, section11, 120r13
Hg(汞)	Not Detection	IEC62321, IEC111, IECmethod, section10
Cr(六價鉻)	Not Detection	IEC62321, IEC111
PBBS類	Not Detection	IEC62321, IEC111, IECmethod, section7
PBDES類	Not Detection	IEC62321, IEC111, IECmethod, section7

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

ACF-PS4PA10-03-LF
SERIES | 03 WAY | LEADFREE
1.0mm
PANEL FRONT
4.8mm SOLDER
MALE

DESCRIPTION: