

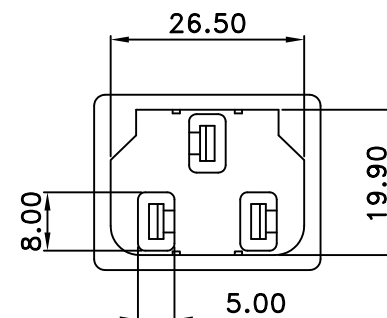
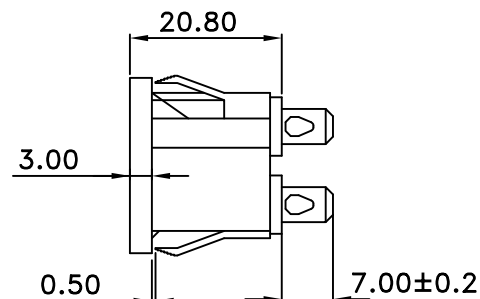
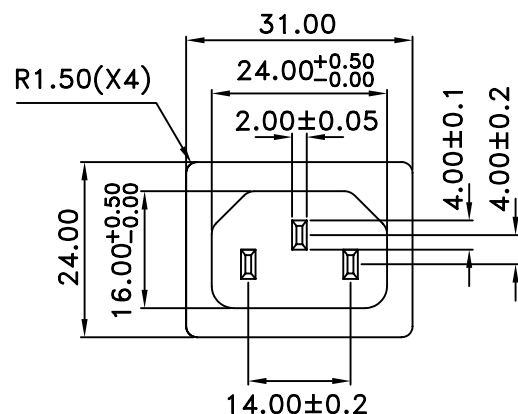
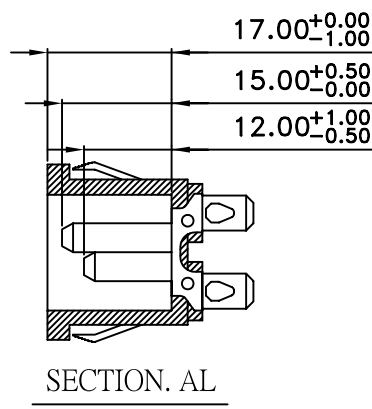


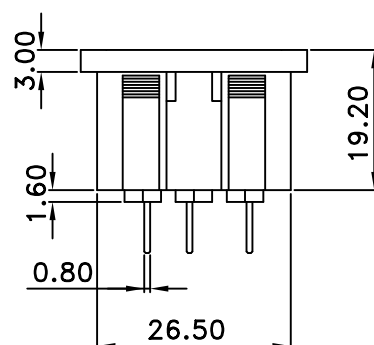

THICKNESS:
0.8 ~ 3.0t (X=20.3)



10A/15A 250V~

1. SOLDERING: PIN BRASS STRIP 0.8t TIN PLATING
2. CONTACT: PIN BRASS STRIP 4t TIN PLATING
3. BODY INSULATOR: NYLON 66 UL94V-0

TERMINAL	CODE XX
4.8mm (187") SOLDER /Q.D. TABS	ACF-PQ4PA-03
4.0mm SOLDER TABS	ACF-PS4PA-03
2.5mm SOLDER TABS	ACF-PS2PA-03
6.3mm (250") FAST-ON TABS	ACF-PQ6PA-03

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

ACF-PxxPA-03-LF
SERIES | | LEADFREE
MALE | 03 WAY
PANEL FRONT
Q4:4.8mmTAB
S4:4.0mm SOLDER
...

DESCRIPTION: