
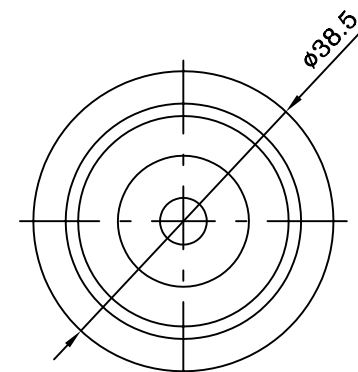
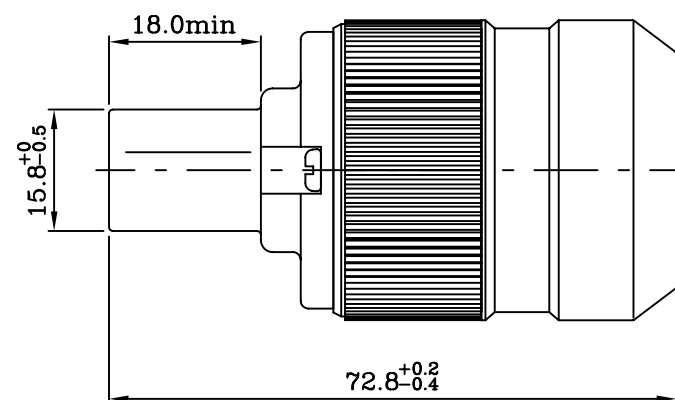
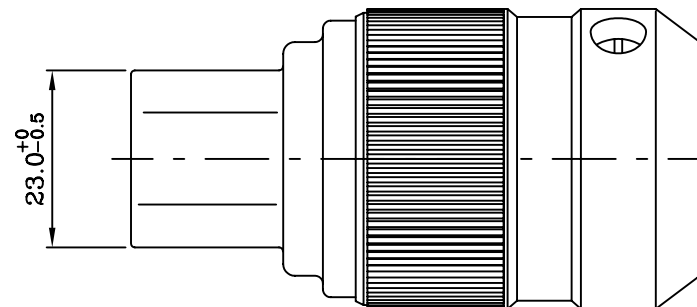


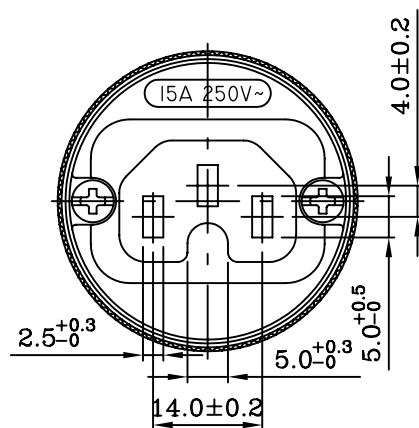

Description	Notes
Screw plating: Ni	
All plating: Au	

SPECIFICATION:

1. Insulation Resistance: Over 100MΩ at 500V DC.
2. Dielectric strength: 2000V AC 1 Minute.
3. Body Material: Thermoplastic 94V-2~V-0.
4. Rating: 10A 250V

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

ACF-SAXx-03-LF
SERIES | T | LEADFREE
03 WAY
TR: TRANSPARENT
RD: RED COLOR
BL: BLUE COLOR
FEMALE | ASSEMBLY

DESCRIPTION: