
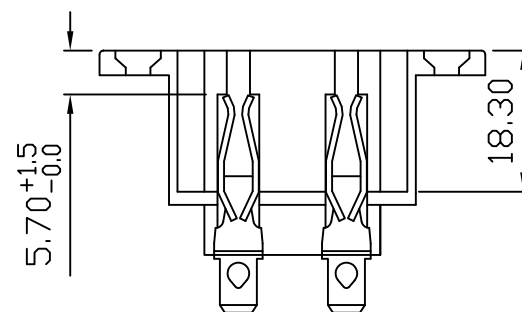
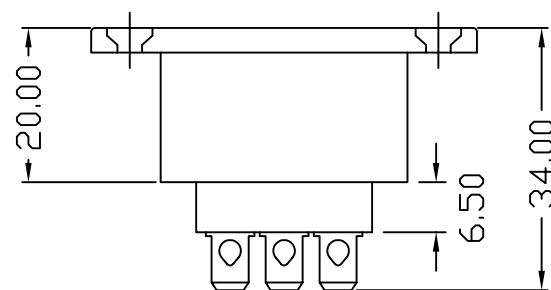


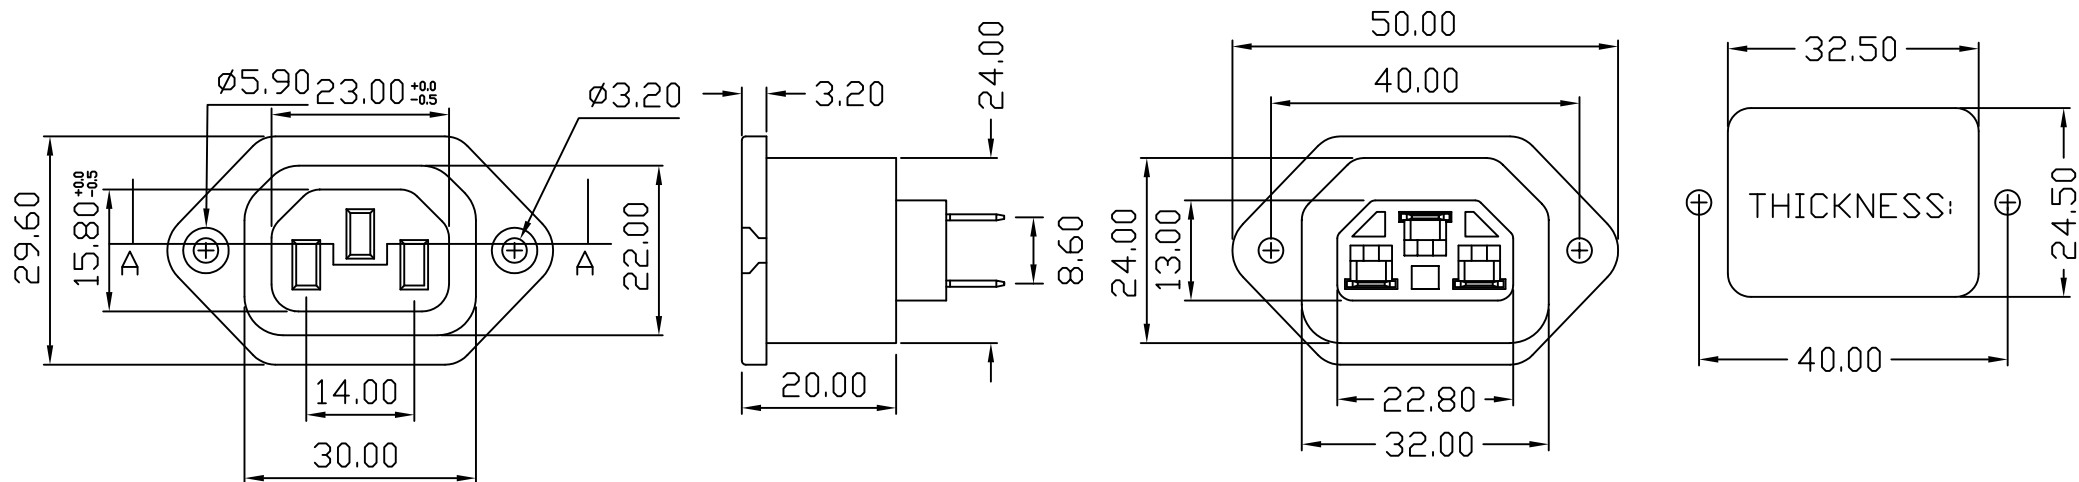

SECTION A - A

10A/15A 250V~

1. SOLDERING: PIN BRASS STRIP 0.8t TIN PLATING
2. CONTACT: PIN BRASS STRIP TIN PLATING
3. BODY INSULATOR: PBT UL94-0

TERMINAL	CODE XX
4.8mm (187") SOLDER/Q.D. TABS	ACF-SHQ4-03
4.0mm SOLDER TABS	ACF-SHS4-03
6.3mm (250") FAST-ON TABS	ACF-SHQ6-03

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm SCALE 1:1

DATE

SIZE A4

X. ± 0.30
X. ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

ACF-SHxx-03-LF
SERIES
LEADFREE
03 WAY
Q4: TAB 4.8mm
S4: 4.8mm SOLDER
Q6: TAB 6.3mm
HORIZONTAL TERMINAL

DESCRIPTION: