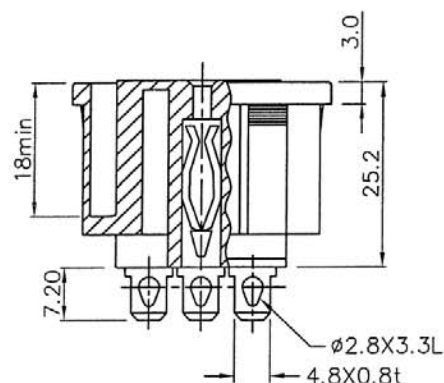
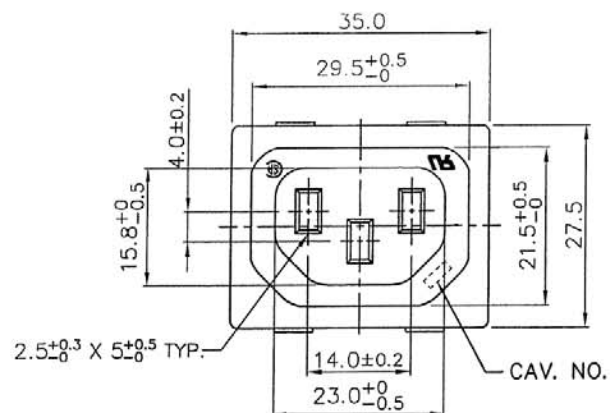


SPECIFICATION

A.. MATERIAL:


- 1.HOUSING: NYLON 66 FLAMMABILITY UL 94V-0
- 2.TERMINAL: COPPER ALLOY, TIN-PLATED

B: CHARACTERISTICS:

- 1.RATING: 10A 250V~
- 2.INSULATION RESISTANCE: 100MΩ MIN, AT 500V DC
- 3.ELECTRIC STRENGTH: AC 2,000V FOR ONE MINUTE

C: APPROVALS:

UL, CSA, ENEC & CCC



THICKNESS:
0.8~1.2t X=25.2
1.3~2.0t X=25.4

PANEL CUT-OUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.3
.XX ± 0.2
.XXX ± 0.1
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

ACF-SQ4PA-03-LF
SERIES T LEADFREE
03WAY
PANEL FRONT
4:4.8mm
QUICK TAB
FEMALE

DESCRIPTION: