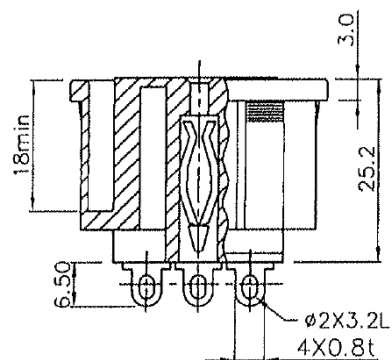
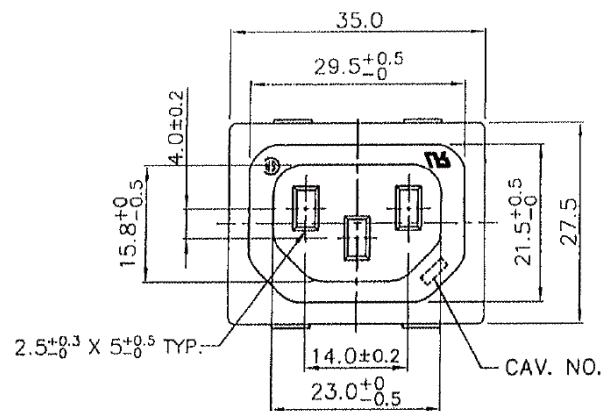


SPECIFICATION

A. MATERIAL:

1.HOUSING: NYLON 66 FLAMMABILITY UL 94V-0

2.TERMINAL: COPPER ALLOY, TIN-PLATED

B: CHARACTERISTICS:


1.RATING: 10A 250V~

2.INSULATION RESISTANCE: 100MΩ MIN, AT 500V DC

3.ELECTRIC STRENGTH: AC 2,000V FOR ONE MINUTE

C: APPROVALS:

UL, CSA, ENEC & CCC



THICKNESS:

0.8~1.2t X=25.2

1.3~2.0t X=25.4

PANEL CUT-OUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

ACF-SS4PA-03-LF
SERIES | | | LEADFREE
| | | 03WAY
| | | PANEL FRONT
| | | 4:4.0mm
| | | SOLDER
| | | FEMALE

DESCRIPTION: