
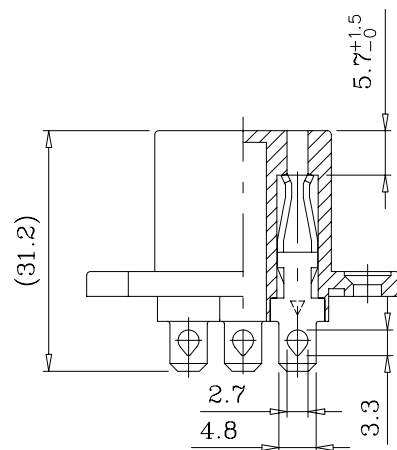
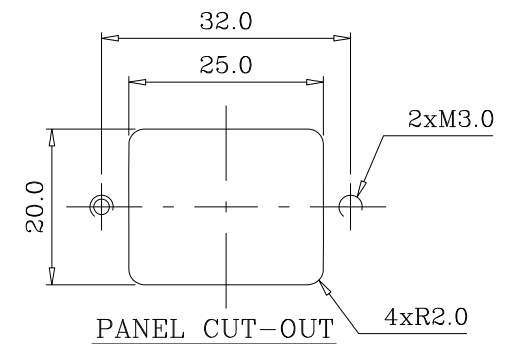




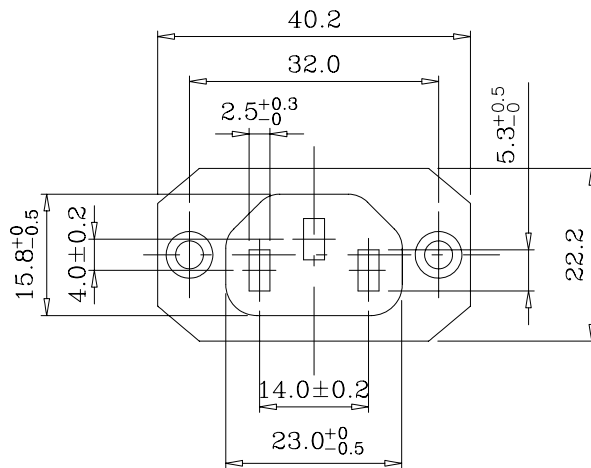

Q4	S2	S4	Q6
4.8	2.8	4.0	6.4
6.4	5.4	5.4	8.3

SPECIFICATION:

1. Insulation Resistance: Over 100MΩ at 500V DC.
2. Dielectric strength: 2000V AC 1 Minute.
3. Body Material: Thermoplastic 94V-0~2.

Rating:AC 10A 250V					
符號	安規	認證編號	符號	安規	認證編號
	VDE	40006954		DEMCO	313008-01
	NEMKO	P04203172		SEMKO	411668
	3C	A031318		FIMKO	21112
Rating:AC 15A 250V					
	UL	E128780		CUL	E128780

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

ACF-SxxPEHT-03-LF

SERIES FEMALE LEADFREE
03WAY HORIZONTAL TERMINAL
PANEL EAR
Q4:QUICK/TAB/4.8mm
S2:SOLDER/TAB/2.8mm
S4:SOLDER/TAB/4.0mm
Q6:QUICK/TAB/6.4mm

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

DESCRIPTION: