


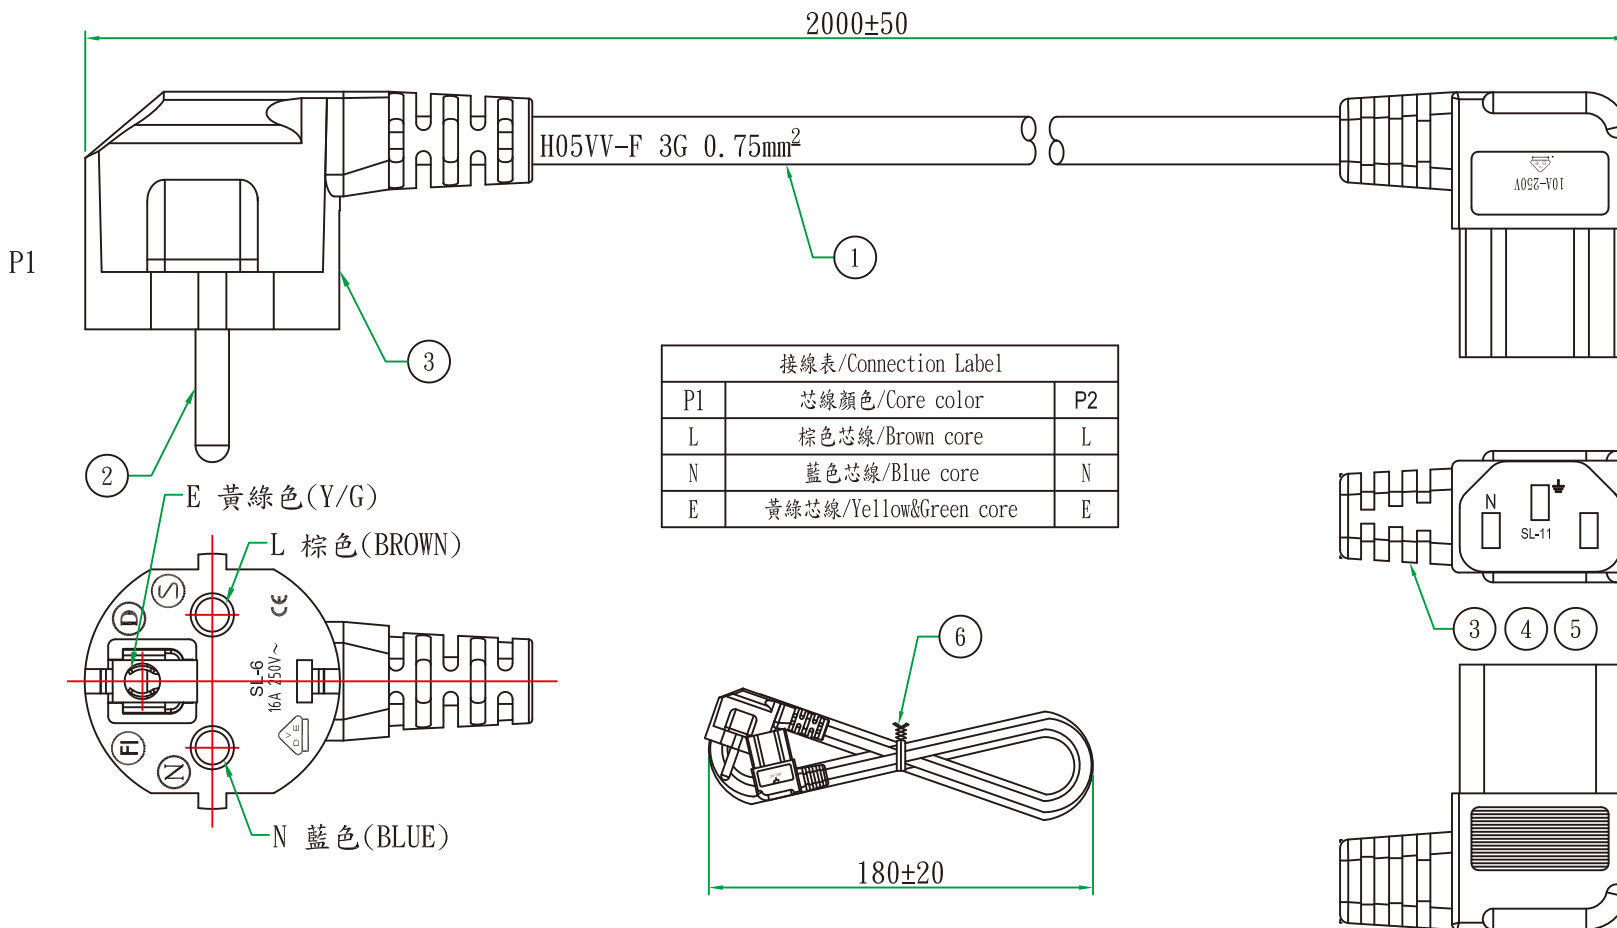

| 接線表/Connection Label |                        |    |
|----------------------|------------------------|----|
| P1                   | 芯線顏色/Core color        | P2 |
| L                    | 棕色芯線/Brown core        | L  |
| N                    | 藍色芯線/Blue core         | N  |
| E                    | 黃綠芯線/Yellow&Green core | E  |

| Bill of Material |             |                                     |      |
|------------------|-------------|-------------------------------------|------|
| ⑥                | 扎帶/Tie      | 黑色(BLACK)PVC有鐵芯紫帶, L=150mm. 符合RoHS. | 1PCS |
| ⑤                | 內膜/Inner    | 尾叉內膜 WHITE                          | 1PCS |
| ④                | 端子/Terminal | 2*4尾叉端子(16-18#)                     | 3PCS |
| ③                | 膠料/Plastic  | 45P-BLACK低鉛低鎘PVC料                   | g    |
| ②                | 端子/Terminal | 法支架 BLACK                           | 1PCS |
| ①                | 電源線/Cable   | H05VV-F 3G 0.75mm² 外被黑色(BK) L=2M    | 1PCS |
| No.              | 品名          | 規格 / 描述                             | 用量   |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

ACFACR-3R2R18-A2M-LF

SERIES

LEADFREE

2000mm

FEMALE TO MALE

18 AWG

3 PIN 90° TO 2 PIN 90°

DESCRIPTION: