

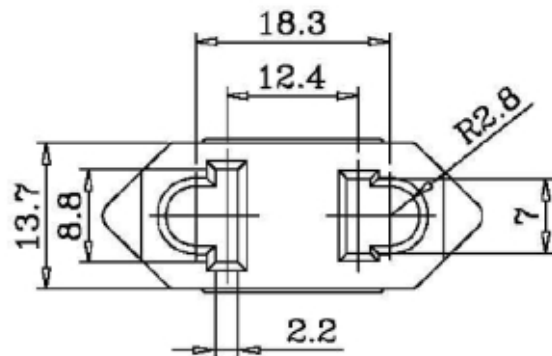


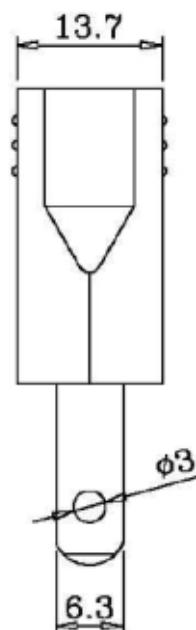

4	夾片(圓扁插)	2	Bsp1-1/2H	t=0.4 t=0.5	Ni-Plated
3	端子	2	Bsp1-1/2H	t=1.4	Ni-Plated
2	底座(扁孔)	1	Nylon#66	94V-2	
1	外殼(圓扁孔)	1	Nylon#66	94V-2	
編號	零件名稱	數量	材質	規格	加工處理

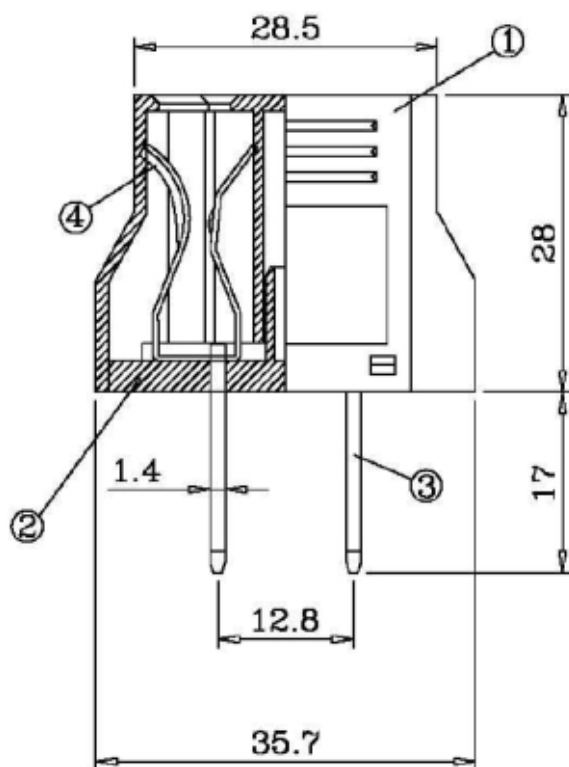

Specifications

1. Rating: 10A 110V-250VAC
2. Insulation Resistance: DC 500V 100M Ω (min)
3. Dielectric Strength: 2000VAC/1 Minute
4. FORCES NECESSARY TO INSERT AND TO WITHDRAW THE CONNECTOR: 1kg~5kg

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

ACFACR-ES-0202-LF

SERIES

LEADFREE

02 TO 02 WAY

MALE TO FEMALE

DESCRIPTION: