


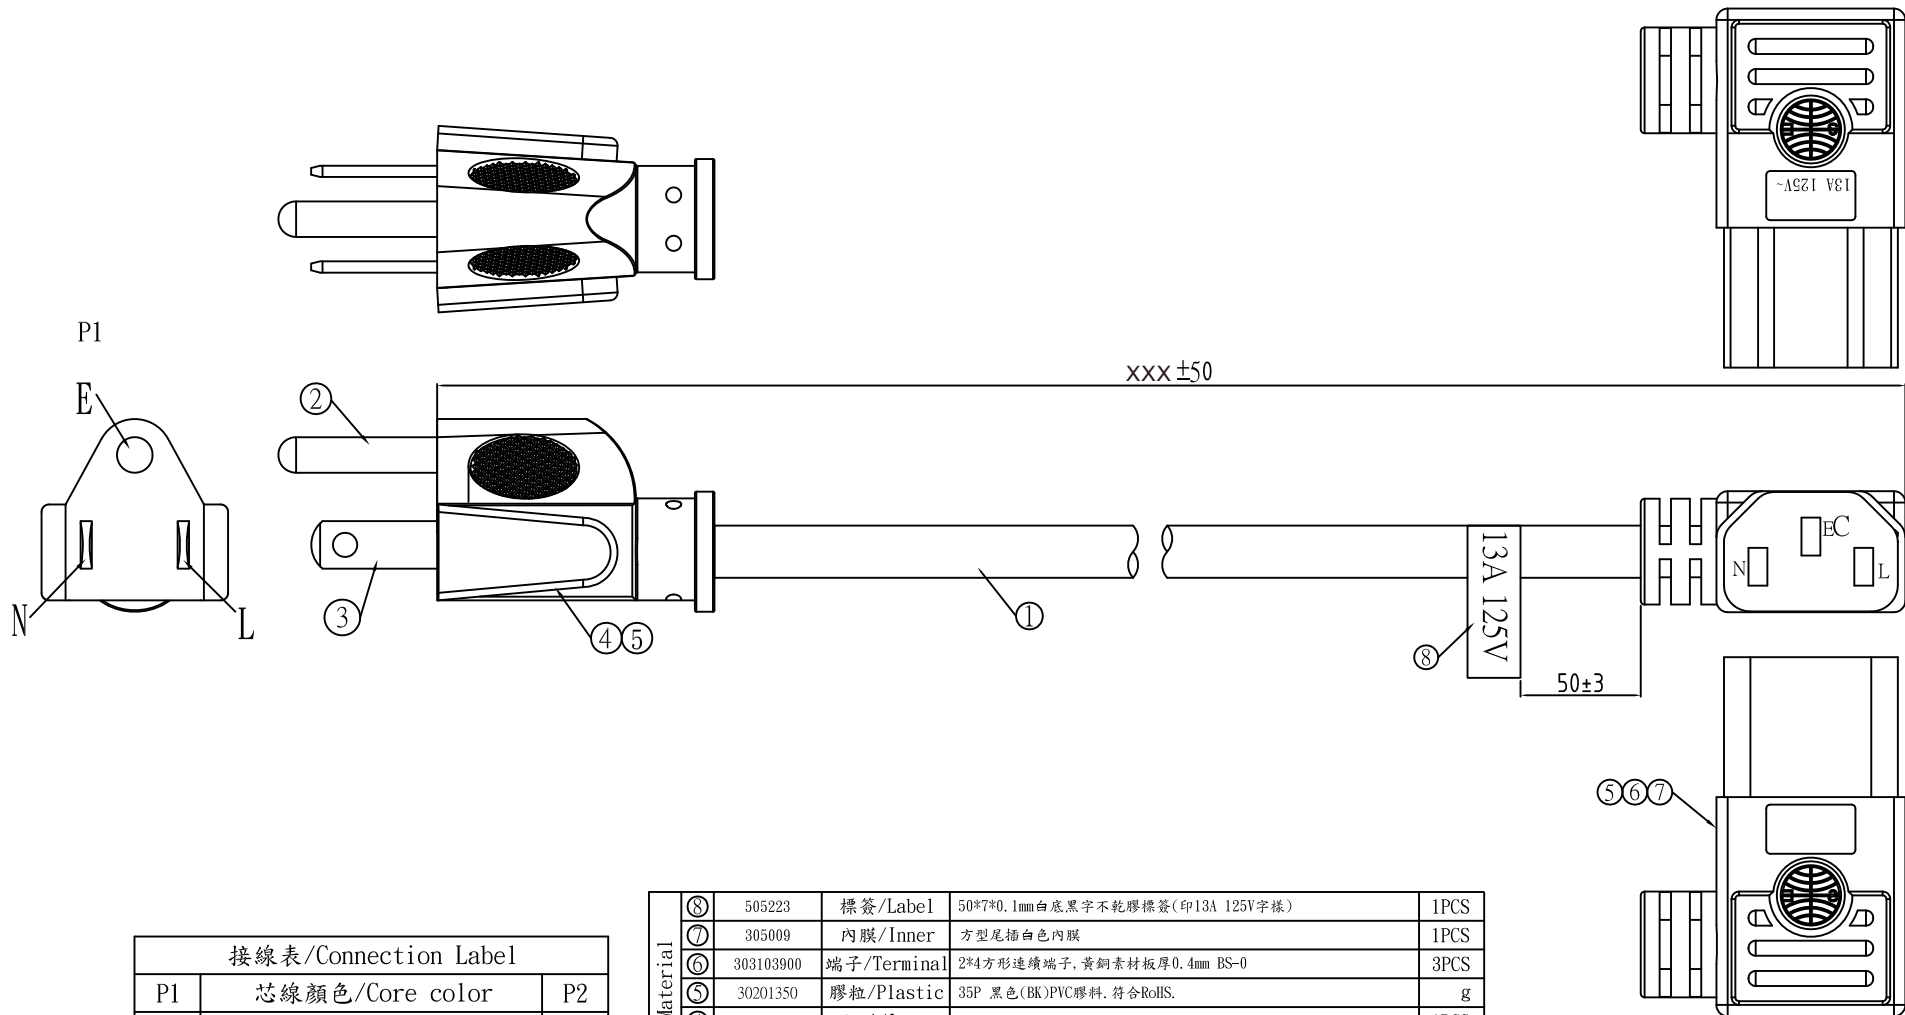

接線表/Connection Label		
P1	芯線顏色/Core color	P2
L	黑色芯線/Black core	L
N	白色芯線/White core	N
E	綠色芯線/Green core	E

Bill of Material	⑧	505223	標籤/Label	50*7*0.1mm白底黑字不乾膠標籤(印13A 125V字樣)	1PCS
	⑦	305009	內膜/Inner	方型尾插白色內膜	1PCS
	⑥	303103900	端子/Terminal	2*4方形連續端子,黃銅素材板厚0.4mm BS-0	3PCS
	⑤	30201350	膠粒/Plastic	35P 黑色(BK)PVC膠料,符合RoHS.	g
	④	305005	內膜/Inner	美式三插白色(WT)內膜.	1PCS
	③	303103001	端子/Terminal	8.25無極平頭單片 BS-1	2PCS
	②	303101501	端子/Terminal	4.75圓銅管 BS-1	1PCS
	①	3010495010025003A	電源線/Cable	SJT 3x16AWG 105°C 外被黑色(BK) 印四字 L=2.5M 符合RoHS.	1PCS
No.		料號	品名	規格/描述	用量

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X.±
.X±
.XX±
.XXX±
ANG±

照片框

ORDER INFORMATION

ACFACU-3R3S16-Axxx-LF

SERIES

LEADFREE

2M5:2500mm

3M65:3650mm

FEMALE TO MALE

16 AWG

3 PIN 90° TO 3 PIN 180°

DESCRIPTION: SJT 3x16AWG 105°C 外被黑色(BK) 印四字 L=2.5M