
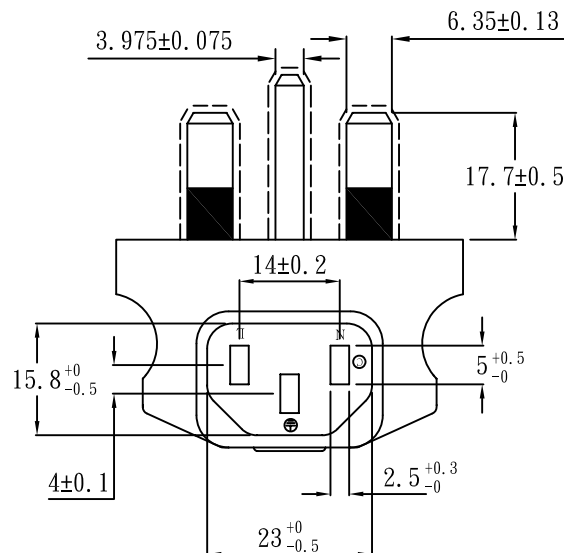
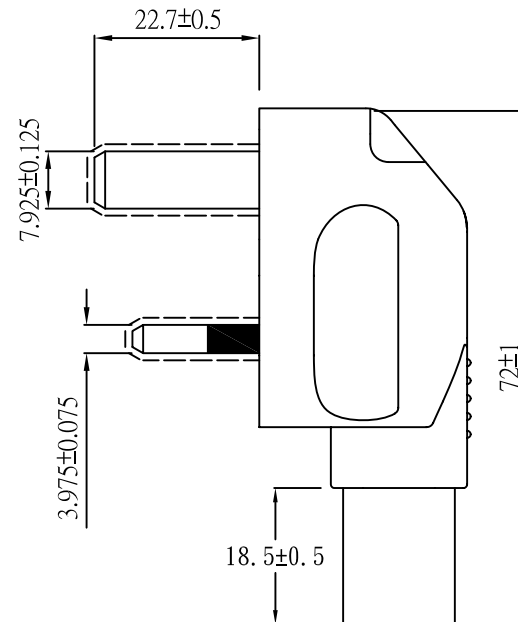
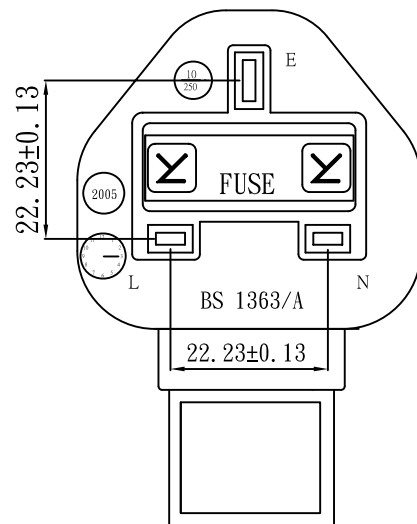


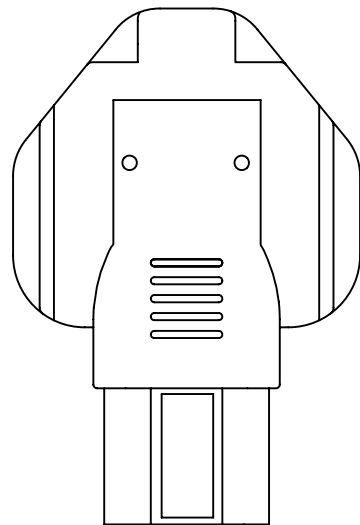

Note:

- 1.Rating:10A 250V
- 2.Insulation Resistance:100M Ω
- 3.Dielectric Voltage:2000V/sec

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG $\pm 1^\circ$

PPOJECTION

ORDER INFORMATION

ACFBSI-AMU-0303-LF

SERIES

LEADFREE

03 TO 03 WAY

UPRIGHT

MOLDING

FEMALE TO MALE

DESCRIPTION: