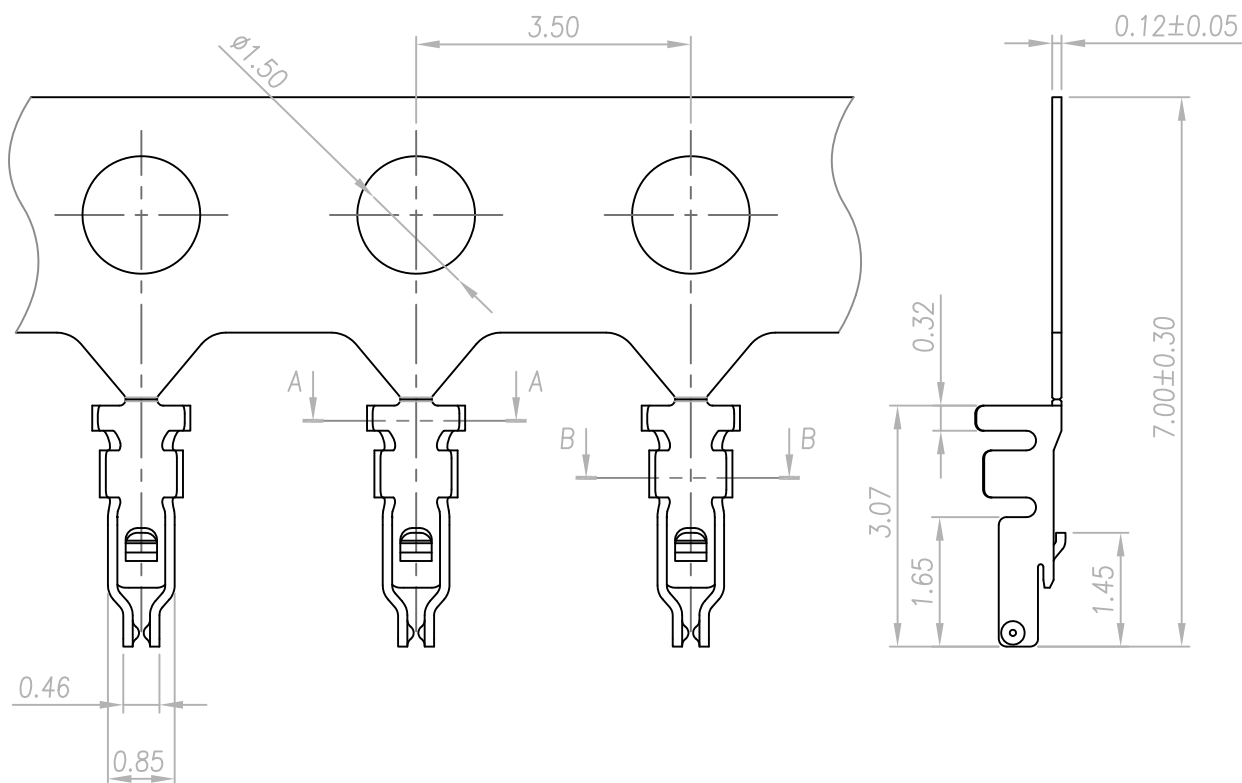


Specification


- 1.Current Rating:2.0A AC/DC, AWG#28~#30
- 2.Voltage Rating:50V AC/DC
- 3.Contact Resistance:10mΩ Max.
- 4.Insulation Resistance:100MΩ Min.
- 5.Dielectric Withstanding Voltage: 500 VAC Minute
- 6.Operating Temperature:-25℃~85℃

Material:

1.Contact:Copper Alloy T=0.12mm

Finish:

1.Contact:Gold Flash Over Nickel



Specifications & Ordering Information:

P/N	Thickness	Material	Wire Range	Finish	Q'ty / Reel
ACH-TG-28	0.12mm	PHOS.	AWG #28~30	See P/N Option	20000pcs

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.20
.XX ± 0.15
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

ACH-TG-28-LF
SERIES T LEADFREE
28~30AWG
GOLD
TERMINAL

DESCRIPTION: 1.2mm Wire-to-Board Terminal