


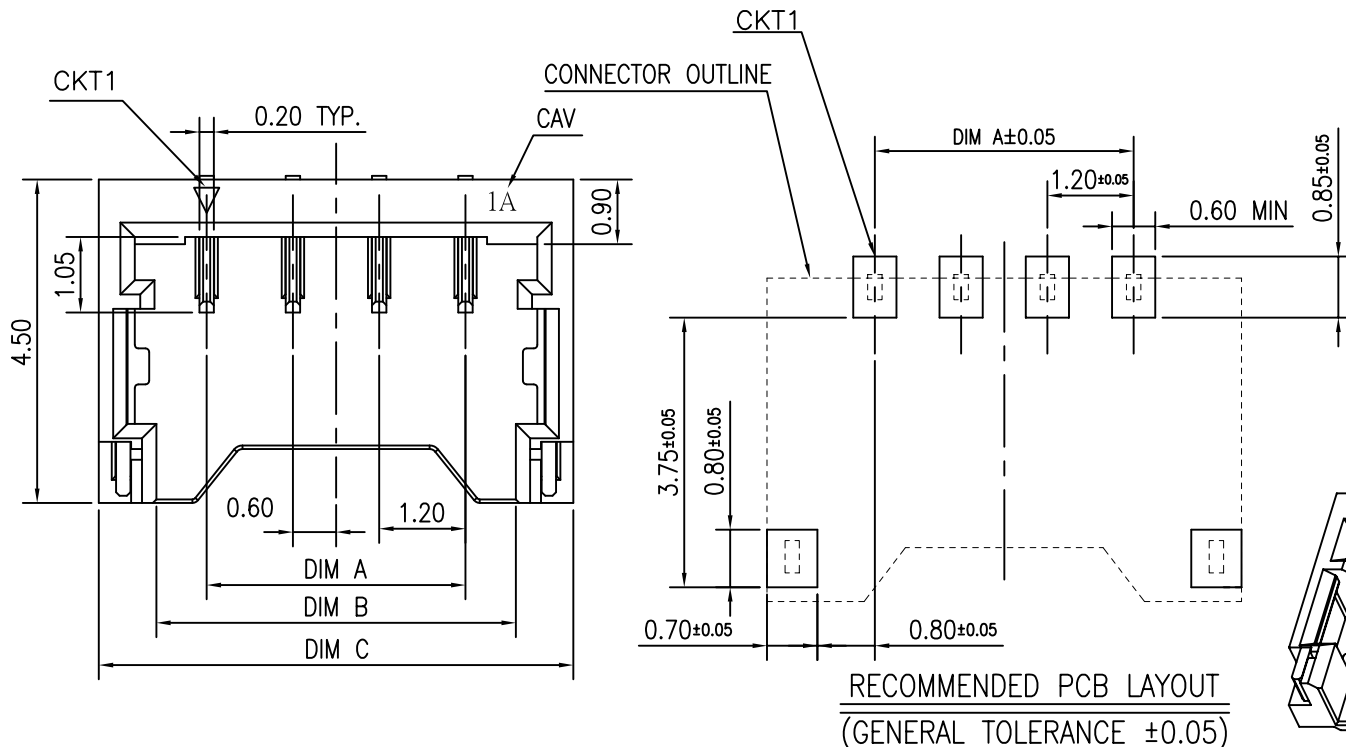


NOTES:

1. MATERIAL:

- 1.1 HOUSING: THERMOPLASTIC, HIGH TEMP; UL94V-0; COLOR: BLACK.
- 1.2 CONTACT: COPPER ALLOY.
- 1.3 FITTING NAIL: COPPER ALLOY

2. FINISH:

- 2.1 TERMINAL:
50u" MIN. NICKEL UNDERPLATING OVERALL.
GOLD FLASH (1~3u" PLATING) ON CONTACT AREA.
- 2.2 FITTING NAIL:
50u" MIN. NICKEL UNDERPLATING OVERALL.
100u" MIN. MATT TIN PLATING OVERALL.

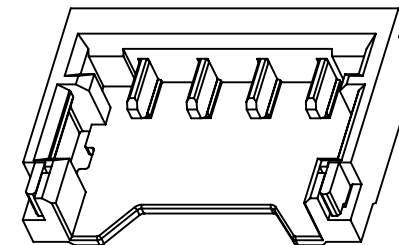

CKT	Dim A	Dim B	Dim C
2	1.2	2.6	4.2
3	2.4	3.8	5.4
4	3.6	5.0	6.6
5	4.8	6.2	7.8
6	6.0	7.4	9.0
7	7.2	8.6	10.2
8	8.4	9.8	11.4
9	9.6	11.0	12.6
10	10.8	12.2	13.8
11	12.0	13.4	15.0
12	13.2	14.6	16.2
13	14.4	15.8	17.4
14	15.6	17.0	18.6
15	16.8	18.2	19.8

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG ±


PPOJECTION

照片框

ORDER INFORMATION

ACH-VR-xx-LF
SERIES T LEAD FREE
02~15 WAY
REEL
180°SMT

DESCRIPTION: 1.2mm PITCH WTB WAFER CONNECTOR

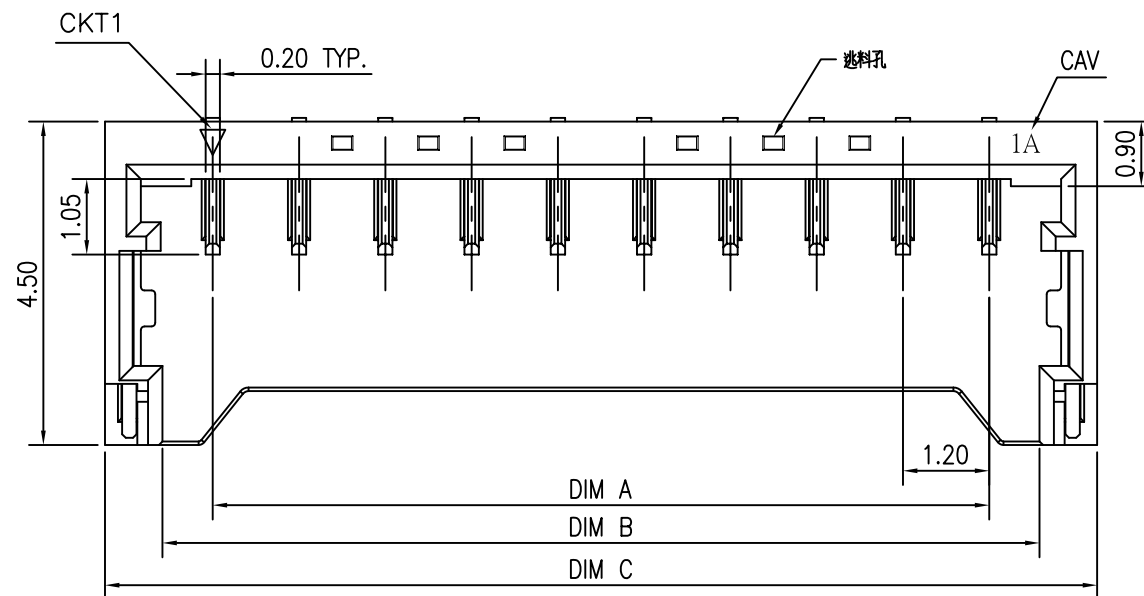

10pin(含)以上加逃料

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.15

DATE

.XXX ± 0.10

ANG $\pm$

SIZE A4

PPOJECTION


ORDER INFORMATION

ACH-VR-xx-LF
SERIES | T | LEAD FREE
02~15 WAY
REEL
180° SMT

煜倫股份有限公司

www.morethanall.com


DESCRIPTION: 1.2mm PITCH WTB WAFER CONNECTOR

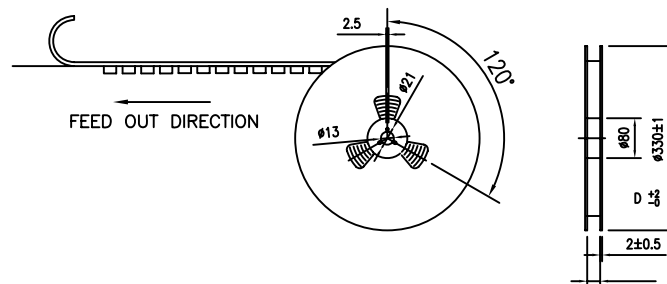

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE: ± 0.20 mm
2. CARRIER CAMBER NOT TO EXCEED 1mm IN 100mm.
3. ALL DIMENSIONS MEET EIA-481-C REQUIREMENTS.
4. MATERIAL: CLEAR ANTI-STATIC POLYSTYRENE.
5. THICKNESS: 0.3 ± 0.05 mm.
6. PACKING LENGTH PER 13" REEL : 36.5 METERS.
7. COMPONENT LOAD PER 13" REEL : 4500 PCS.





CKT	A	B	C	D	E
2	5.5	4.5	16.0	12.4	1.0
3		5.7			1.5
4	7.5	6.9		16.4	2.5
5		8.1			
6		9.3			
7	7.5	10.5	24.0	24.4	
8		11.7			
9		12.9			
10		14.1			
11		15.3			
12		16.5			
13		17.7			

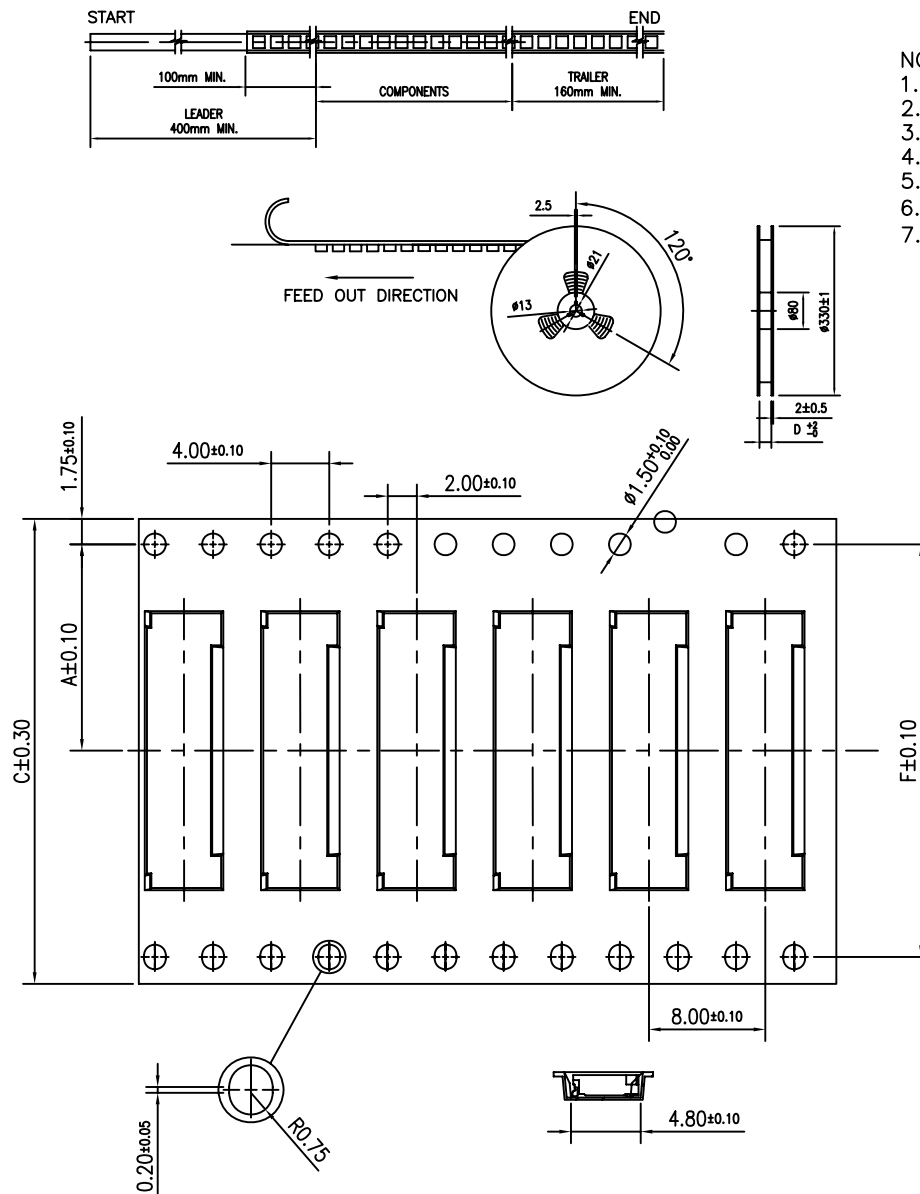

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE:±0.20mm
2. CARRIER CAMBER NOT TO EXCEED 1mm IN 100mm.
3. ALL DIMENSIONS MEET EIA-481-C REQUIREMENTS.
4. MATERIAL: CLEAR ANTI-STATIC POLYSTYRENE.
5. THICKNESS: 0.3 ± 0.05 mm.
6. PACKING LENGTH PER 13" REEL : 36.5 METERS.
7. COMPONENT LOAD PER 13" REEL : 4500 PCS.

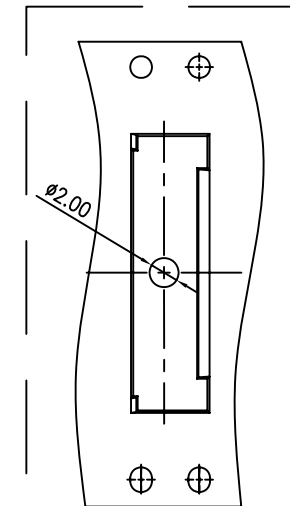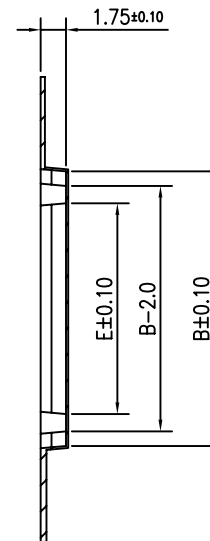

With Hole Sketch Map

CKT	A	B	C	D	E	F
14	14.20	18.90	32.00	32.40	14.50	28.40

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

ACH-VR-xx-LF
SERIES T LEAD FREE
02~15 WAY
REEL
180°SMT

DESCRIPTION:1.2mm PITCH WTB WAFER CONNECTOR