

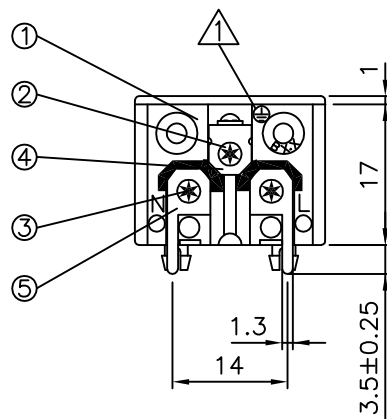

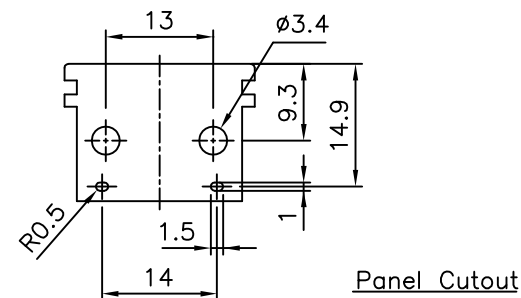
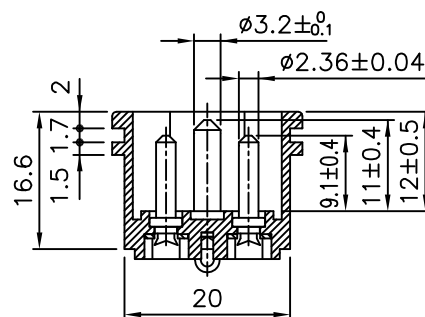





Rating: 2.5A 250V AC
Approvals: UL/CSA/VDE/NEMKO/CCC

5	Soldering PIN Brass Strip t=0.5mm Tin-Plated(Matte tin)	2
4	Soldering PIN-TOP Brass Strip t=0.5mm Tin-Plated(Matte tin)	1
3	Solid Contact PIN Brass Strip d=Ø2.36mm Ni-Plated	2
2	Solid Contact PIN Brass Strip d=Ø3.2mm Ni-Plated	1
1	Body Insulator PC Black Color	1

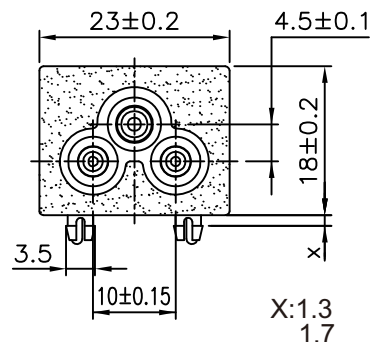

Panel Cutout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

ACR-PRP-03-LF
SERIES T T LEADFREE
03 WAY
POST
DIP 90°
MALE

DESCRIPTION: