
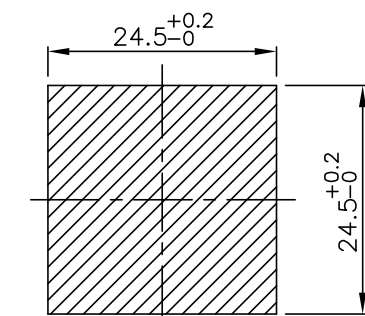
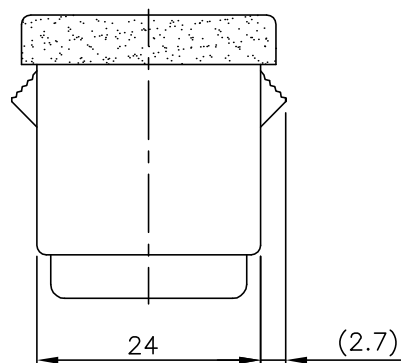



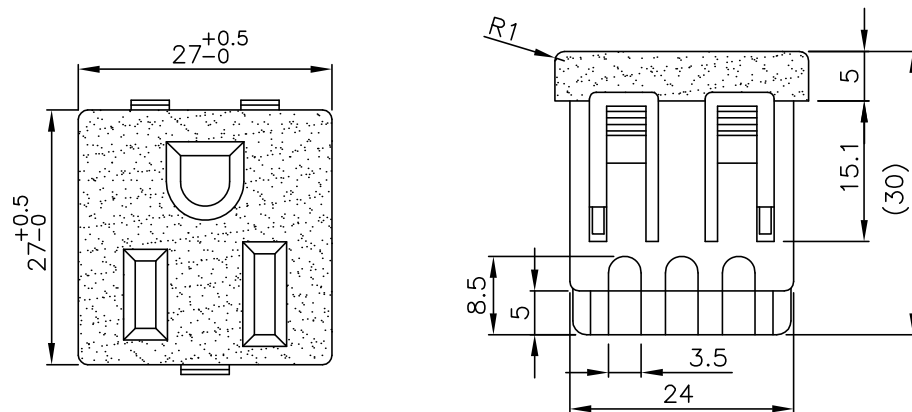


PANEL CUTOUT  
THICKNESS 0.8~1.8 mm

NOTE: THIS ILLUSTRATION PERTAINS TO SOLID WIRE APPLICATIONS ONLY

Rating : 15A 125V AC  
Approvals : UL/CSA

### SINGLE SOCKET

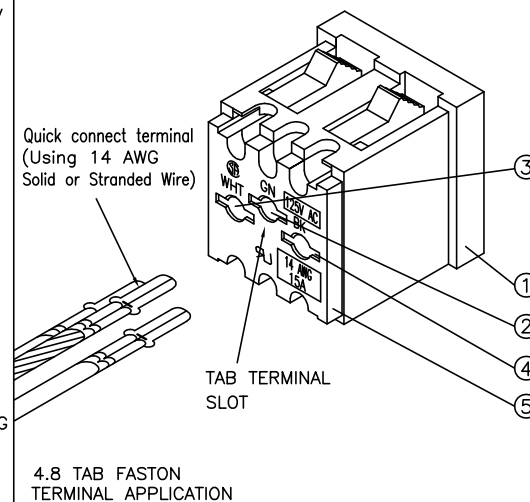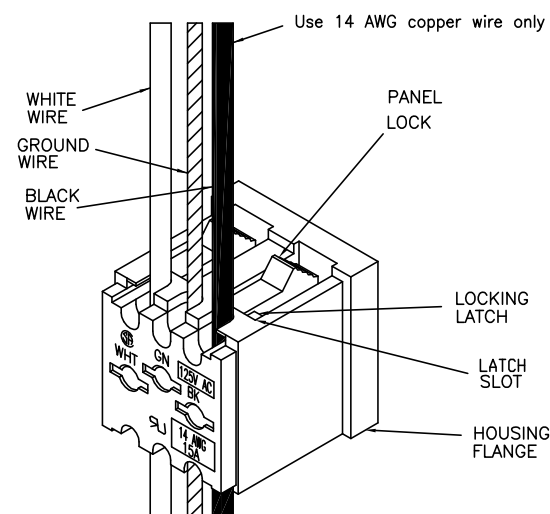

|   |                                           |   |
|---|-------------------------------------------|---|
| 5 | Back cover Material NYLON 66              | 1 |
| 4 | Contact PIN Brass Strip t=0.4mm           | 1 |
| 3 | Contact PIN Brass Strip t=0.4mm Ni-Plated | 1 |
| 2 | Contact PIN Brass Strip t=0.4mm           | 1 |
| 1 | Body Material NYLON 66                    | 1 |

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.40


.X ± 0.30

.XX ± 0.10

.XXX ±

ANG ± 1°

PPOJECTION



### ORDER INFORMATION

ACU-S114PA-03-LF

SERIES

LEADFREE

03 WAY

PANEL FRONT

14 AWG

SOCKET IDC

DESCRIPTION: