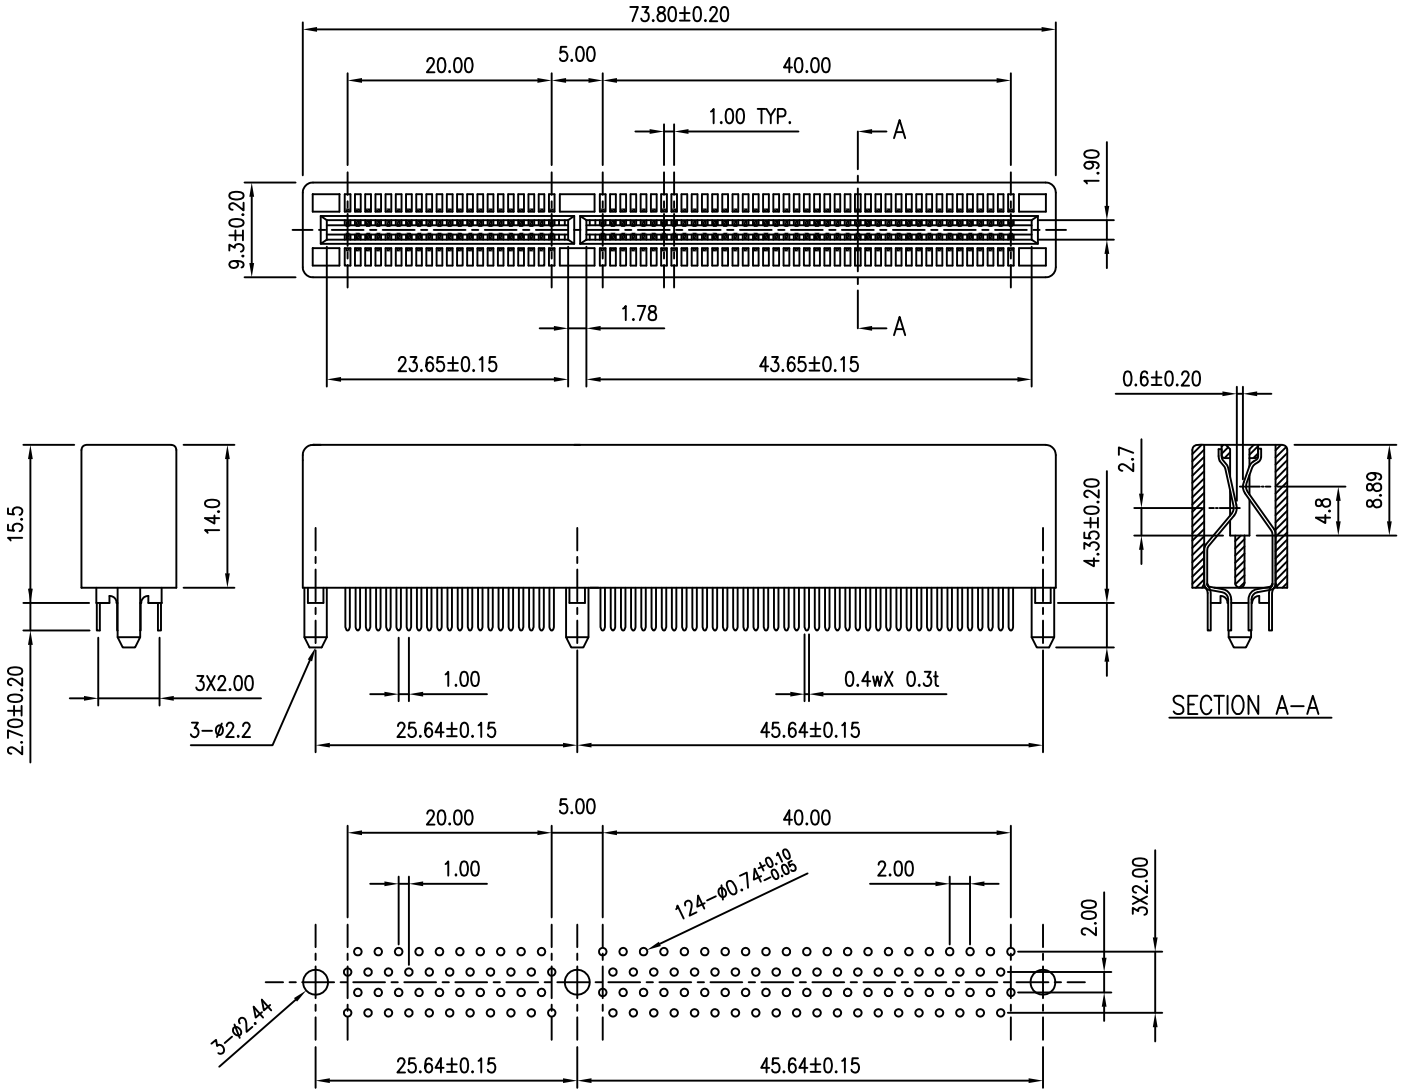

MATERIAL

INSULATOR: GLASS-REINFORCED THERMOPLASTIC.
CONTACT: COPPER ALLOY.
PLATING: MATING AREA – SELECTED GOLD OVER NICKEL.
SOLDER AREA – TIN/LEAD OVER NICKEL.
NICKEL 50㎛" MIN.
TIN/LEAD 100㎛".

ELECTRICAL

VOLTAGE RATING: 250 VAC RMS.
CURRENT RATING: 1 AMP.
DIELECTRIC WITHSTANDING VOLTAGE: 400 VAC RMS 60Hz FOR 1 MINUTE.
INSULATION RESISTANCE: 800 MEGOHMS MIN AT 500 VDC.
CONTACT RESISTANCE: 20 MILLIOHMS MAX AT 1 AMP DC.

MECHANICAL

RETENTION FORCE: 500 GRAMS MIN PER CONTACT.
INSERTION FORCE: 92.4 GRAMS MAX PER CONTACT PAIR.
WITHDRAWAL FORCE: 25 GRAMS MIN PER CONTACT PAIR.

ENVIRONMENTAL

TEMPERATURE RANGE: -55°C TO +85°C.

RoHS Compliant

MORETHANALL PCB CONNECTORS Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		X. ±
UNIT / mm	SCALE 1 : 1	.X ±
		.XX ±
DATE		.XXX ±
		ANG ±
SIZE A4	PPOJECTION	

照片框

ORDER INFORMATION

AGP-DP-124-LF

SERIES
POST
DIP 180°
124 WAY
LEADFREE

DESCRIPTION: AGP 124P SLOT (WITH POST)