


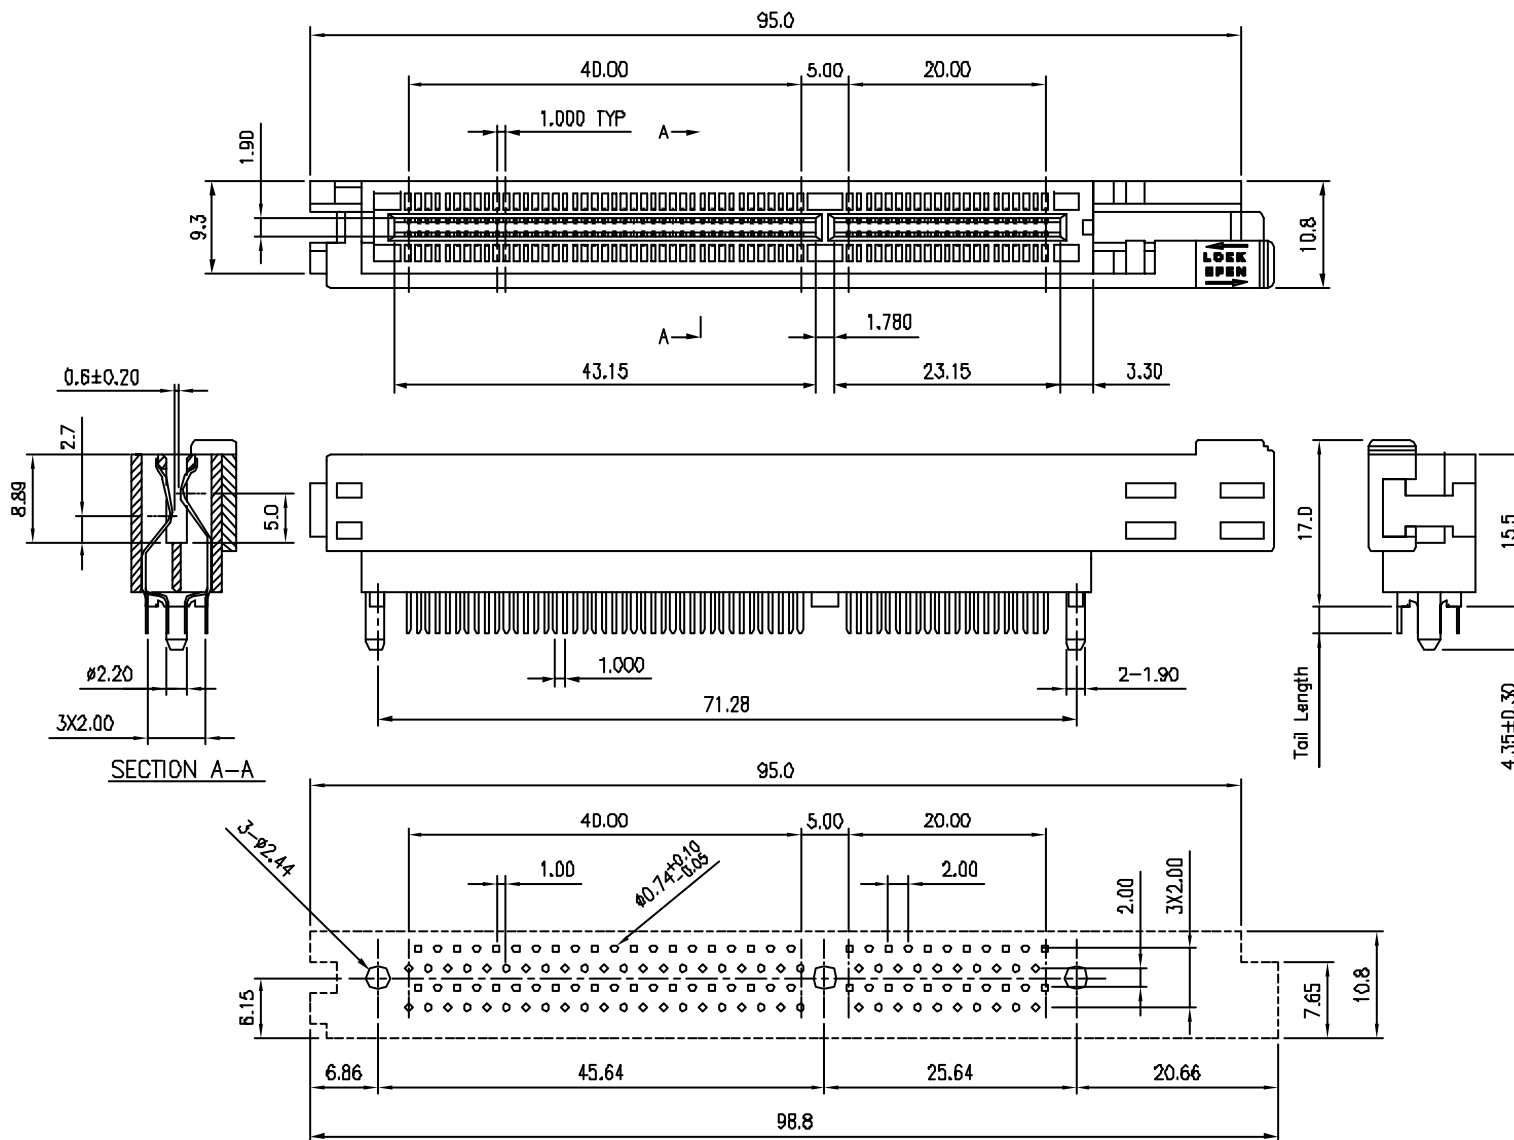

MATERIAL
 INSULATOR: GLASS-REINFORCED THERMOPLASTIC.
 CONTACT: COPPER ALLOY.
 PLATING: MATING AREA - SELECTED GLOD OVER NICKEL.
 SOLDER AREA - TIN/LEAD 100u" OVER NICKEL 50u" MIN.

ELECTRICAL
 VOLTAGE RATING: 250 VAC RMS.
 CURRENT RATING: 1 AMP.
 DIELECTRICAL WITHSTANDING VOLTAGE: 400 VAC RMS 60 Hz FOR 1 MINUTE.
 INSULATION RESISTANCE: 800 MEGOHMS MIN AT 900 VDC.
 CONTACT RESISTANCE: 20 MILLIOHMS MAX AT 1 AMP DC.

MECHANICAL
 RETENTION FORCE: 500 GRAMS MIN PER CONTACT.
 INSERTION FORCE: 120 GRAMS MAX PER CONTACT PER.
 WITHDRAWAL FORCE: 15 GRAMS MIN PER CONTACT PER.

ENVIRONMENTAL
 TEMPERATURE RANGE: -55°C TO +85°C.

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG ± 1°

照片框

ORDER INFORMATION

AGP-DPL-124-LF
 SERIES T T LEADFREE
 124 WAY
 LOCK
 POST
 DIP 180°

DESCRIPTION: AIMM 124P 1.5V WITH POST SLOT , A TYPE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com