


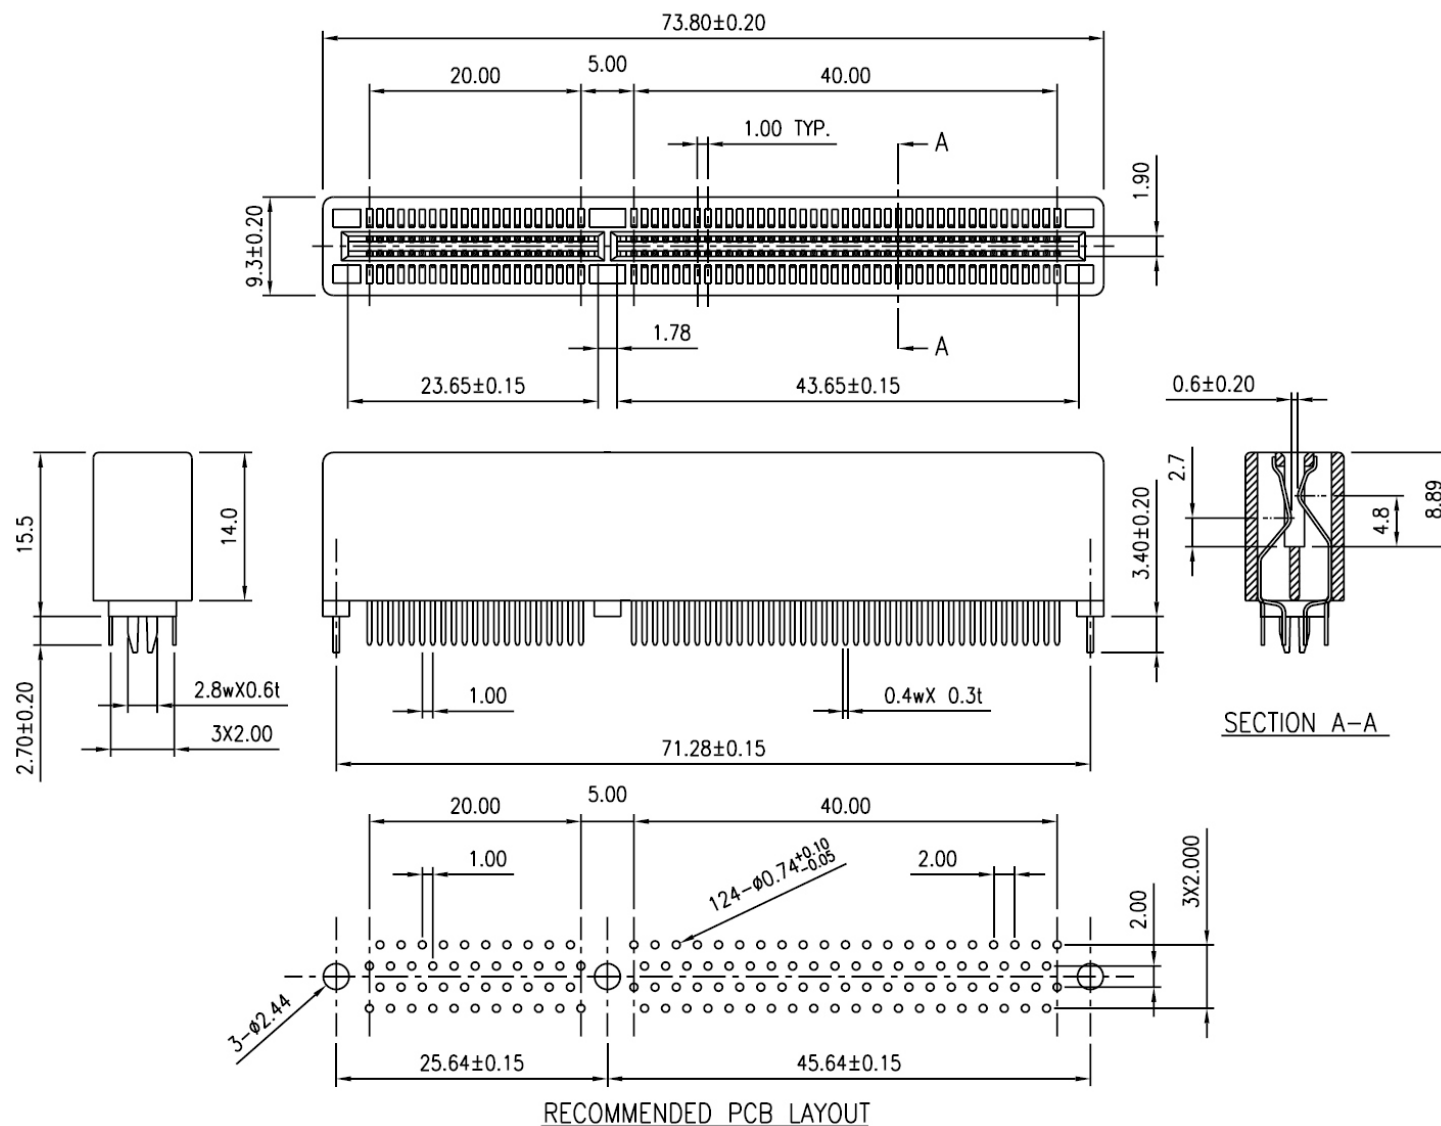

MATERIAL
 INSULATOR: GLASS-REINFORCED THERMOPLASTIC.
 CONTACT: COPPER ALLOY.
 PLATING: MATING AREA - SELECTED GOLD OVER NICKEL.
 SOLDER AREA - TIN OVER NICKEL.
 NICKEL 50μ" MIN.
 TIN 100 " 庭

ELECTRICAL
 VOLTAGE RATING: 250 VAC RMS.
 CURRENT RATING: 1 AMP.
 DIELECTRIC WITHSTANDING VOLTAGE: 400 VAC RMS 60Hz FOR 1 MINUTE.
 INSULATION RESISTANCE: 800 MEGOHMS MIN AT 500 VDC.
 CONTACT RESISTANCE: 20 MILLIOHMS MAX AT 1 AMP DC.

MECHANICAL
 RETENTION FORCE: 500 GRAMS MIN PER CONTACT.
 INSERTION FORCE: 92.4 GRAMS MAX PER CONTACT PAIR.
 WITHDRAWAL FORCE: 25 GRAMS MIN PER CONTACT PAIR.

ENVIRONMENTAL
 TEMPERATURE RANGE: -55°C TO +85°C.

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

AGP-DZ-124-LF
 SERIES T LEADFREE
 124 WAY
 CLIP
 DIP 180°

DESCRIPTION: