


Electrical Properties	
Frequency Range	GSM
Impedance	50Ω
V.S.W.R	<3.2
Radiation	Omni
Gain	
Polarization	Vertical


Mechanical Properties	
Whip	PU/PC
Connector	SMA P-P

Frequency range :850/900/1800/1900MHz
 Radiation Patten: Omni Directional
 Polarization: Vertical
 Impedance: 50Ω
 V.S.W.R: < 3.2
 Gain: >=2 dB
 Connector: SMA-P-P
 Storage Temperature: -30° +75
 Operating Temperature: -30° +75
 POWER HANDLING: 1 W MAX

Return Loss

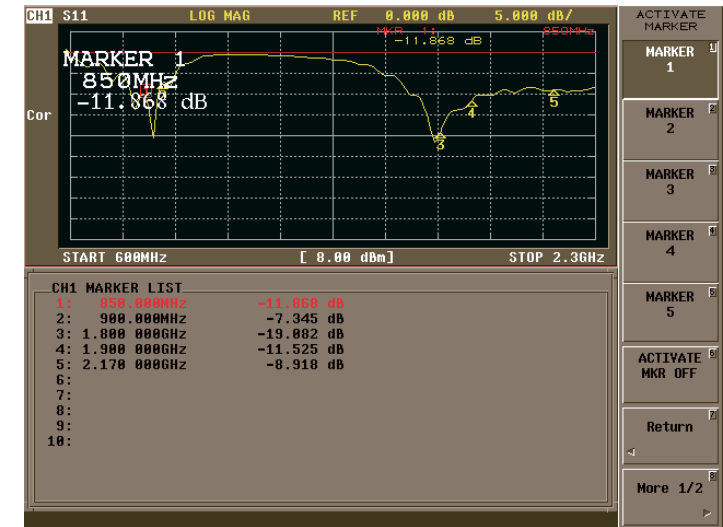

V.S.W.R

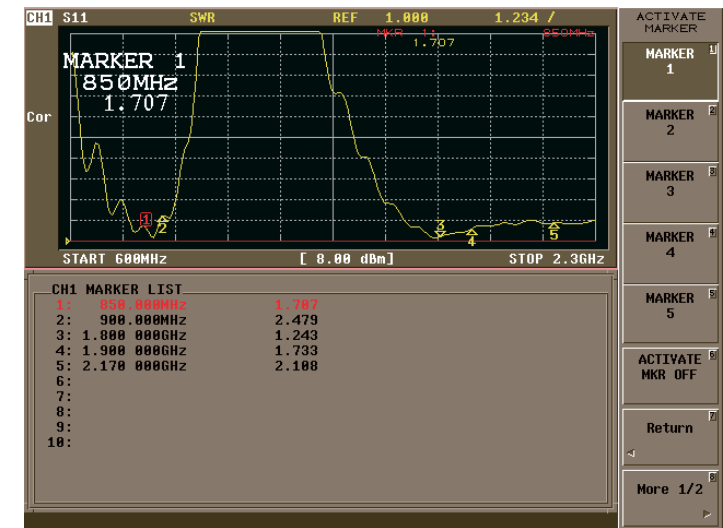

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1:1

.XXX ±

DATE

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

ANTSMA-1S1F2B-M10C8-LF

SERIES | LEADFREE
 | 108mm
 | MALE
 | 2 BAND
 | FOLABLE
 ST

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: GSM Dipole ANTENNA