


SPECIFICATIONS

- * Voltage rating: 600V AC,DC
- * Current rating: 50A AC,DC
- * Contact Barrel Wire Size
- * Accommodation(AWG): 6 to 12
- * Withstanding voltage: 2200V DC/minute
- * Insulation resistance: 200M OHM min
- * Temperature range: -20°C ~ +105°C
- * Material: UL94V-0 PC
- * Tolerance: ±0.3 m/m

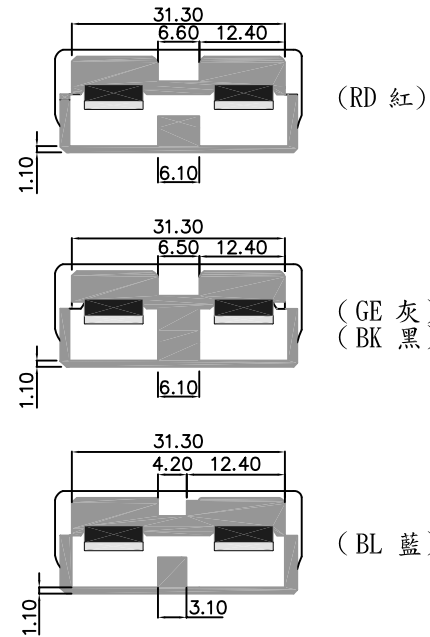

PRAT NO.	COLOR
APB050-HGE-02	GE 灰
APB050-HBK-02	BK 黑
APB050-HRD-02	RD 紅
APB050-HBL-02	BL 藍

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

APB050-Hxx-02-LF

SERIES | LEADFREE
| 02 WAY
BK:BLACK
BL:BLUE
GE:GRAY
RD:RED

DESCRIPTION: