


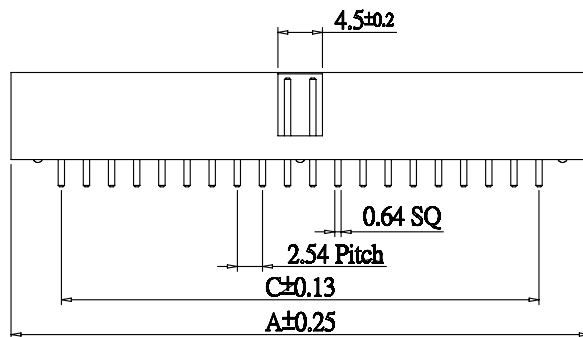


**Specification:**

Current Rating:3A.  
 Withstanding Voltage:500V AC(1min).  
 Insulation Resistance:5000MΩ minmum.  
 Contact Resistance:20MΩ maximum.  
 Operating Temperature:-40°C to +85°C.

**Material:**

Contact:Brass 0.64 Square post.  
 Insulator:Thermoplastic UL94V0.  
 Plating:Gold flash plated nickel.

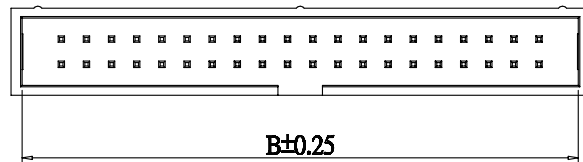

P.C.Board Layout

| Circuits | Dimension |       |       |
|----------|-----------|-------|-------|
|          | A         | B     | C     |
| 6        | 15.24     | 12.94 | 5.08  |
| 8        | 17.78     | 15.48 | 7.62  |
| 10       | 20.32     | 18.02 | 10.16 |
| 14       | 25.4      | 23.1  | 15.24 |
| 16       | 27.94     | 25.64 | 17.78 |
| 20       | 33.02     | 30.72 | 22.86 |
| 24       | 38.1      | 35.8  | 27.94 |
| 26       | 40.64     | 38.34 | 30.48 |
| 30       | 45.72     | 43.42 | 35.56 |
| 34       | 50.8      | 48.5  | 40.64 |
| 40       | 58.42     | 56.12 | 48.26 |
| 50       | 71.12     | 68.82 | 60.96 |
| 60       | 83.82     | 81.52 | 73.66 |
| 64       | 88.9      | 86.6  | 78.74 |

**RoHS Compliant**

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE


SIZE A4

X, ±  
 .X ±  
 .XX ±  
 .XXX ±  
 ANG ±

PPOJECTION

照片框

**ORDER INFORMATION**



DESCRIPTION: 2.54 Pitch Box Header Straight