



P.C.B LAYOUT

MATERIAL
 HOUSING : THERMOPLASTIC UL94V-0
 CONTACT : COPPER ALLOYS

SPECIFICATION
 CURRENT: 3A
 OPERATING TEMPERATURE: -25°C TO +105°C
 DIELECTRIC WITHSTANDING : AC 500 V
 CONTACT RESISTANCE : 20 MOHM MAX
 INSULATION RESISTANCE : 1000 MEGAOHMS MIN

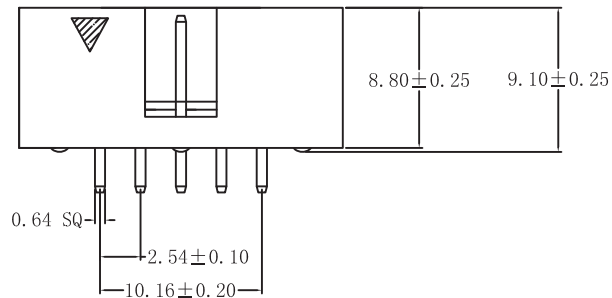

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
 .X ± 0.38
 .XX ± 0.25
 .XXX ±
 ANG ± 5°

照片框

ORDER INFORMATION

B-DD33-10E09-LF
 SERIES | LEADFREE
 | EMPTY#09
 | 10 WAY
 | DIP 3.3mm
 | DIP 180°

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: BOX HEADER 2.54 180° 10(N9)PIN