

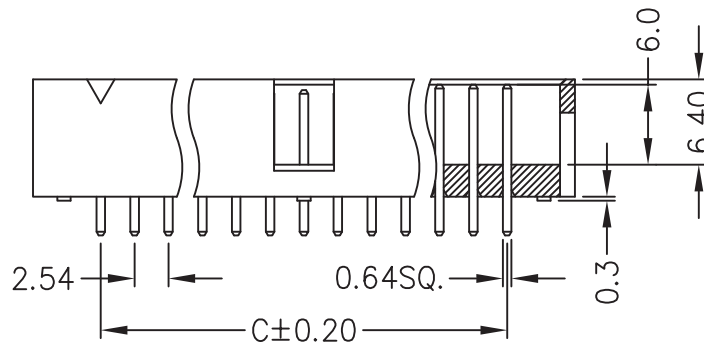


Material:


1. Insulator: PBT+30% Glass Fiber(Meet UL94V-0).
2. Contact: Copper Alloy.
3. Contact Plated: Gold or Tin over Nickel Plated.

Specification:

1. Current Rating: 1 Amp.
2. Withstanding Voltage: AC 500V for 1 Minute.
3. Insulation Resistance: 1000MΩ Min. at DC 500V.
4. Contact Resistance: 15mΩ Max..
5. Operating Temperature: -40°C~+105°C.

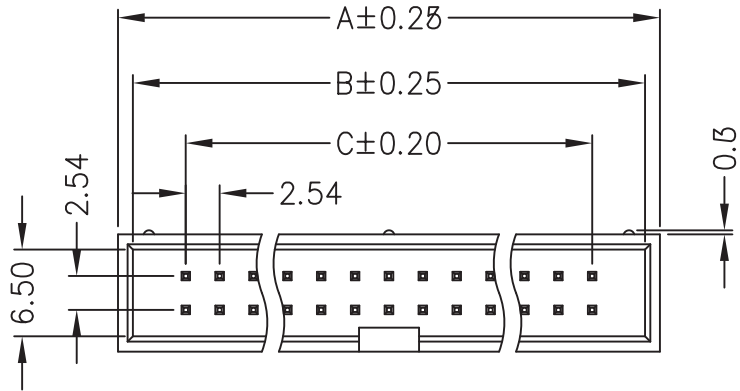

No. of Contacts	Dim. A	Dim. B	Dim. C
10	20.32	18.12	10.16
12	22.86	20.66	12.70
14	25.40	23.20	15.24
16	27.94	25.74	17.78
20	33.02	30.82	22.86
24	38.10	35.90	27.94
26	40.64	38.44	30.48
30	45.72	43.52	35.56
34	50.80	48.60	40.64
40	58.42	56.22	48.26
50	71.12	68.92	60.96
60	83.82	81.62	73.66
64	88.90	86.70	78.74

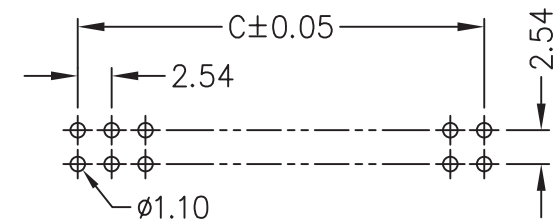

Recommend P.C.B. Layout

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4 PROJECTION

X.±
.X±
.XX±
.XXX±
ANG±

照片框

ORDER INFORMATION

B-DGxx-xx-LF
 SERIES | LEADFREE
 10~64WAY
 G01: FULL GOLD 1u"
 S30: SEMI GOLD 30u"
 DIP 180°

DESCRIPTION: 2.54mm BOX HEADER STRAIGHT TYPE