


FEATURES:

- . 10-64 Circuits
- . PBT + 30% Glass Fiber [UL 94V-0]
- . Fully shrouded body provides maximum protection for header main pins
- . Low profile header body helps maximum packaging density
- . Available with wrap post tail heder

SPECIFICATIONS:

- . Current rating: 3A AC, DC
- . Voltage rating: 250V AC, Maximum
- . Temperature range: -40°C ~ +105°C
- . Contact resistance: Initial Value/10mΩ max.
After environmental testing /20mΩ max.
- . Insulation resistance: 5000 MΩ min
- . Withstand Voltage: 1500V AC/minute
- . Applicable PC Board thickness: .063"[1.6mm]

	Dim.A	Dim.B	Dim.C
10	10.16	17.76	19.66
14	15.24	22.84	24.74
16	17.78	25.38	27.28
20	22.86	30.48	32.36
26	30.48	38.08	39.98
30	35.56	43.16	45.05
34	40.64	48.24	50.12
40	48.26	55.85	68.56
50	60.96	68.56	70.45
60	73.66	81.26	83.16
64	78.74	86.34	88.24

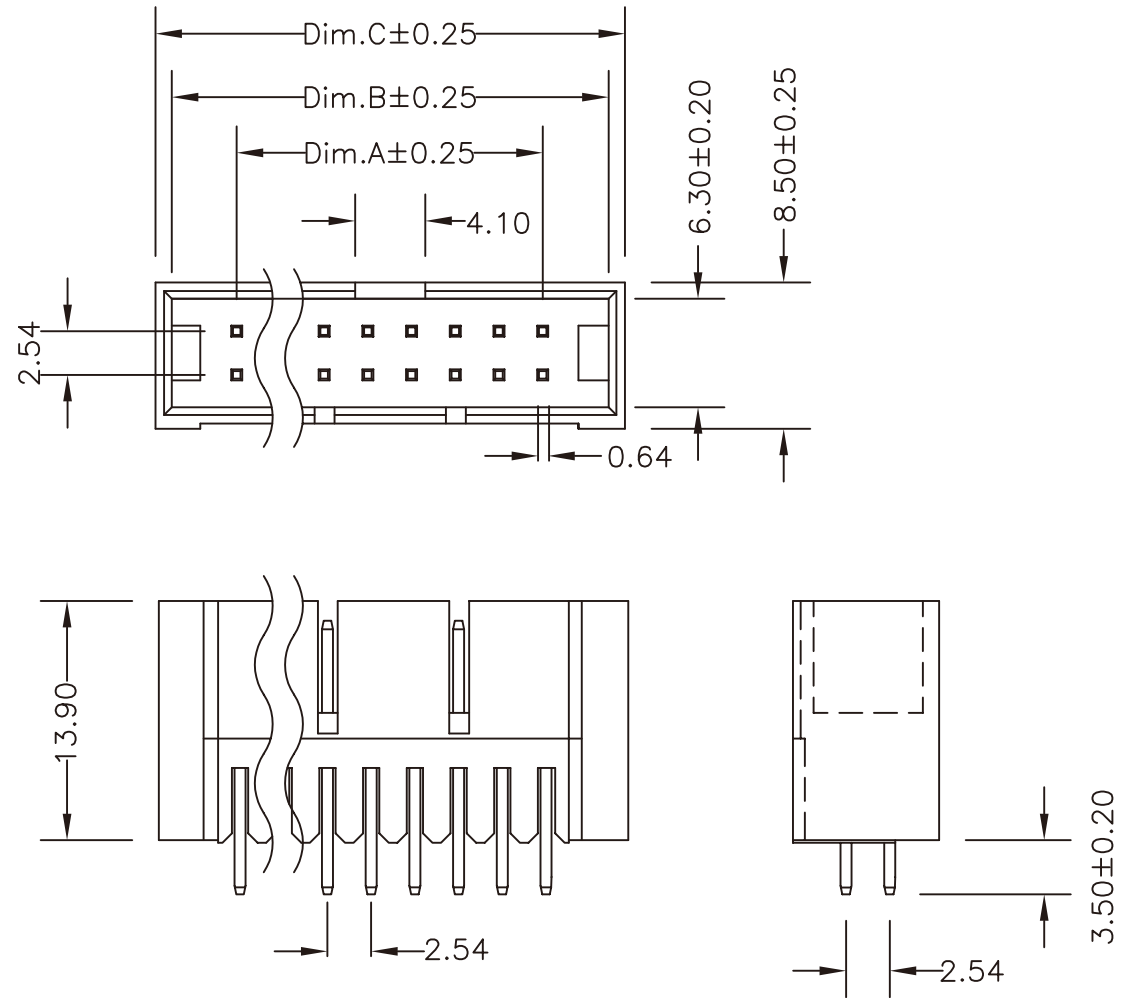

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ±

UNIT / mm SCALE 1 : 1

.XX ±

DATE

.XXX ±

ANG ±

SIZE A4

PJECTION

照片框

ORDER INFORMATION

B-DH13-xx-LF
SERIES | LEADFREE
10-64WAY
HIGH 13.9mm
DIP 180°

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: