

Recommended P.C.B Layout

MATERIAL

Contact Pin : Brass

Insulator: NY10T UL94-V0

SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE


SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 3°

PJECTION


照片框

ORDER INFORMATION

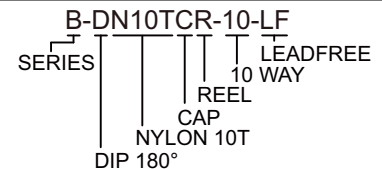

DESCRIPTION: BOX HEADER 2.54*2.54mm, STRAIGHT TYPE ,CAP+TAPE

ITEM	W	A0	B0	K0	K1	P	E	F	D	D1	P0	P2
DIM	44 ^{+0.3} _{-0.3}	9.4 ^{+0.1} _{-0.1}	20.6 ^{+0.1} _{-0.1}	13.7 ^{+0.1} _{-0.1}	10.7 ^{+0.1} _{-0.1}	16 ^{+0.1} _{-0.1}	1.75 ^{+0.1} _{-0.1}	20.2 ^{+0.1} _{-0.1}	1.5 ^{+0.1} _{-0.0}	2.0 ^{+0.25} _{-0.0}	4.0 ^{+0.1} _{-0.1}	2.0 ^{+0.1} _{-0.1}

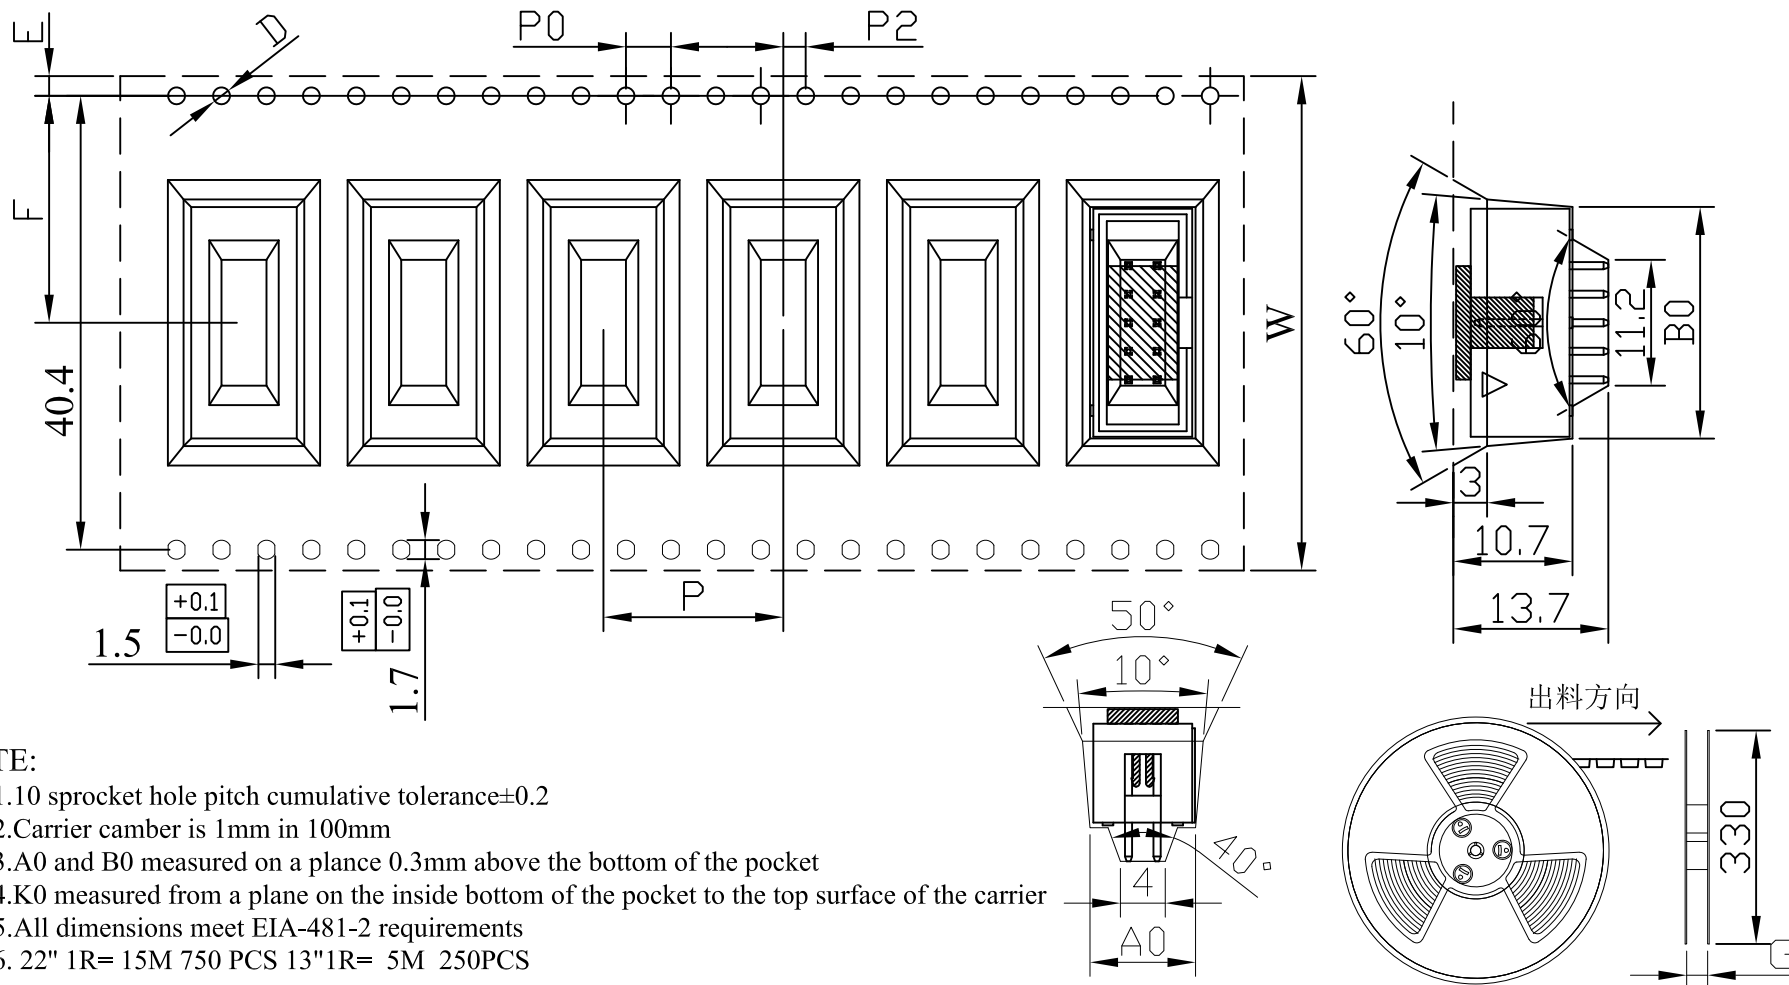

NOTE:

1. 10 sprocket hole pitch cumulative tolerance ± 0.2
2. Carrier camber is 1mm in 100mm
3. A0 and B0 measured on a plane 0.3mm above the bottom of the pocket
4. K0 measured from a plane on the inside bottom of the pocket to the top surface of the carrier
5. All dimensions meet EIA-481-2 requirements
6. 22" 1R= 15M 750 PCS 13"1R= 5M 250PCS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, \pm
.X \pm 0.30
.XX \pm 0.20
.XXX \pm
ANG \pm 3°

PJECTION

照片框

ORDER INFORMATION

B-DN10TCR-10-LF
SERIES REEL LEADFREE
10 WAY
CAP
NYLON 10T
DIP 180°

DESCRIPTION: BOX HEADER 2.54*2.54mm, STRAIGHT TYPE ,CAP+TAPE

煜倫股份有限公司

www.morethanall.com