


Specifications:


Current Rating:3.0A AC,DC
 Voltage Rating:250V AC, DC
 Contact Resistance:20m ohm Max
 Insulation Resistance:1,000M ohm Min
 Withstanding Voltage:600V AC/minute
 Operating Temperature:-40°C ~ +105°C
 Materials:

Insulator:High Temp Plastic (Nylon 6T UL94V-0)
 Standard Color:Black
 Contact:Copper Alloy
 Finish:Gold Plated
 Packing:250pcs/Reel



Notes:
 No. Of Positions 50~64 With Three Key
 All Other Pin With One Key

Pos	Dim A	Dim B	Pos	Dim A	Dim B	Pos	Dim A	Dim B	Note
6	15.28	5.08	16	27.98	17.78	34	50.84	40.64	
8	17.82	7.62	20	33.06	22.86	40	58.46	48.26	
10	20.36	10.16	24	38.14	27.94	50	71.16	60.96	1K&3K
12	22.90	12.70	26	40.68	30.48	60	83.86	73.66	1K&3K
14	25.44	15.24	30	45.76	35.56	64	88.94	78.74	1K&3K

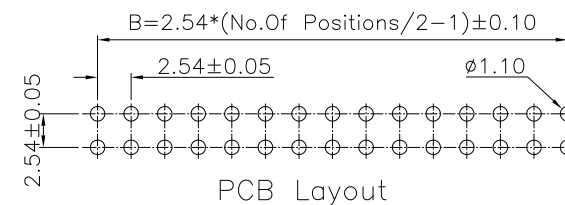

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.20
 .XX ± 0.15
 .XXX ±
 ANG ±

PJECTION

照片框

ORDER INFORMATION

B-DN6TC-xx-LF
 SERIES LEADFREE
 06-64WAY
 CAP
 NYLON 6T
 DIP 180°

DESCRIPTION: 2.54mm Box Header Straight Type