

Specifications

Current Rating : 3.0A AC/DC

Voltage Rating : 250V AC/DC

Contact Resistance : 20m ohm Max

Insulation Resistance : 1000M ohm Min

Withstanding Voltage : 1000V AC for one minute




Operating Temperature Range : -25°C to +125°C

Material and Plating

Plastic : PBT UL94V-0

Contact : Brass

Plating : Gold Plating

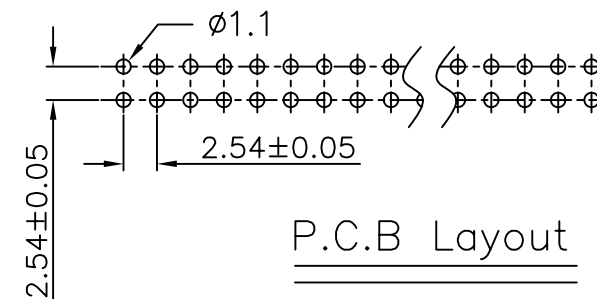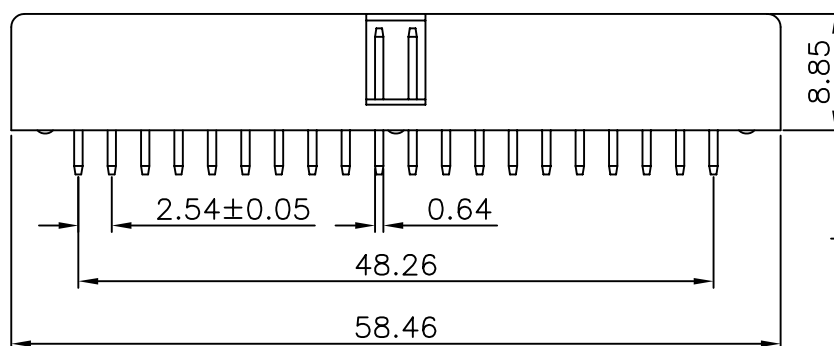

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X.±

UNIT / mm

SCALE 1 : 1

.XX.±

DATE

.XXX.±

ANG.±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

B-DUxx-40-LF
SERIES 40 WAY LEADFREE
BL:BLUE
WH:WHITE
U TYPE
DIP 180°

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 2.54mm Box Header