
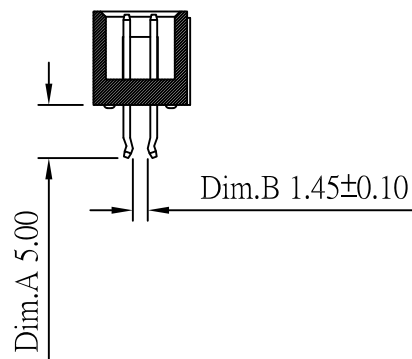


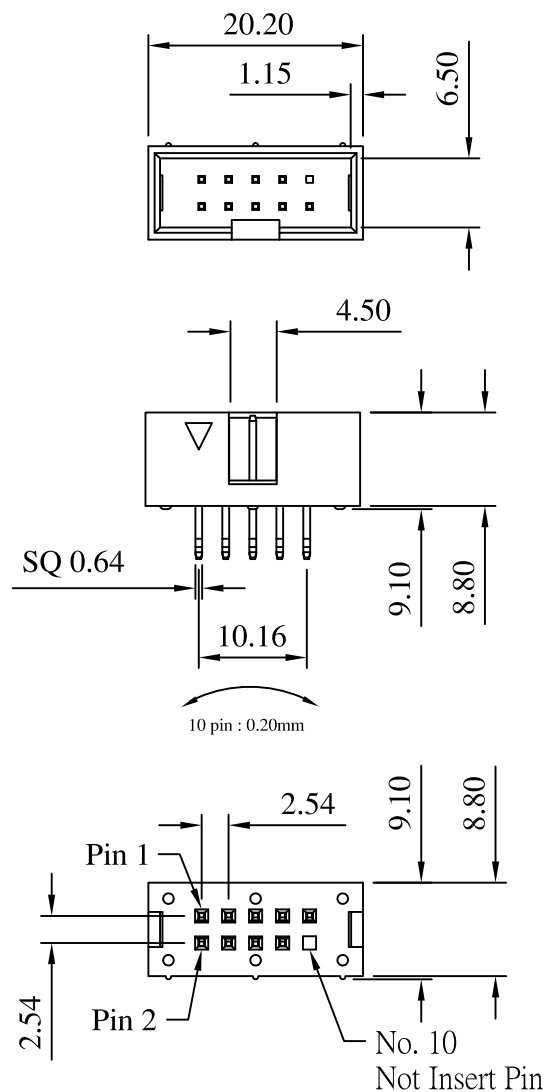

Current Rating Voltage: 3 Amps 250V AC (r.m.s)  
 Insulator Resistance: 5000 Megohms min  
 Contact Resistance: 20 m ohms max.  
 Dielectric Withstanding: 1000 V AC  
 Operating Temperature: - 40° ~ +105° C  
 Contact Material: Copper Alloy  
 Standard: Brass  
 Insulator Material: Polyester, UL 94V-0  
 Standard: PBT


Finish: Standard: Gold Flash all over

Insulator Material: High Temperature  
 Polyester, UL 94V-0

Max Processing Temp: 230° C for 60 seconds

Max Processing Temp: 260° C for 10 seconds

### Recommended P.C. Board Hole Layout

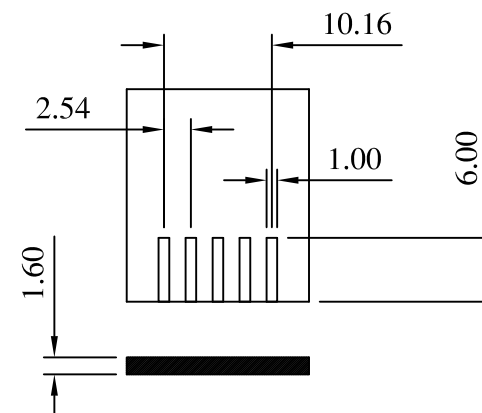

### RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±  
 .X ± 0.30  
 .XX ± 0.20  
 .XXX ± 0.10  
 ANG ±

照片框

### ORDER INFORMATION

B-E16-10E10-LF  
 SERIES LEADFREE  
 10WAY EMPTY 10 PIN  
 EDGE CLIP 1.6mm

DESCRIPTION: