


FEATURES:

- . 10-64 Circuits
- . PBT + 30% Glass Fiber [UL 94V-0]
- . Fully shrouded body provides maximum protection for header main pins
- . Low profile header body helps maximum packaging density
- . Available with wrap post tail hesder

SPECIFICATIONS:

- . Current rating: 3A AC, DC
- . Voltage rating: 250V AC, Maximum
- . Temperature range: -40°C ~ +105°C
- . Contact resistance: Initial Value/10mΩ max.
After environmental testing /20mΩ max.
- . Insulation resistance: 5000 MΩ min
- . Withstand Voltage: 1500V AC/minute
- . Applicable PC Board thickness: .063"[1.6mm]

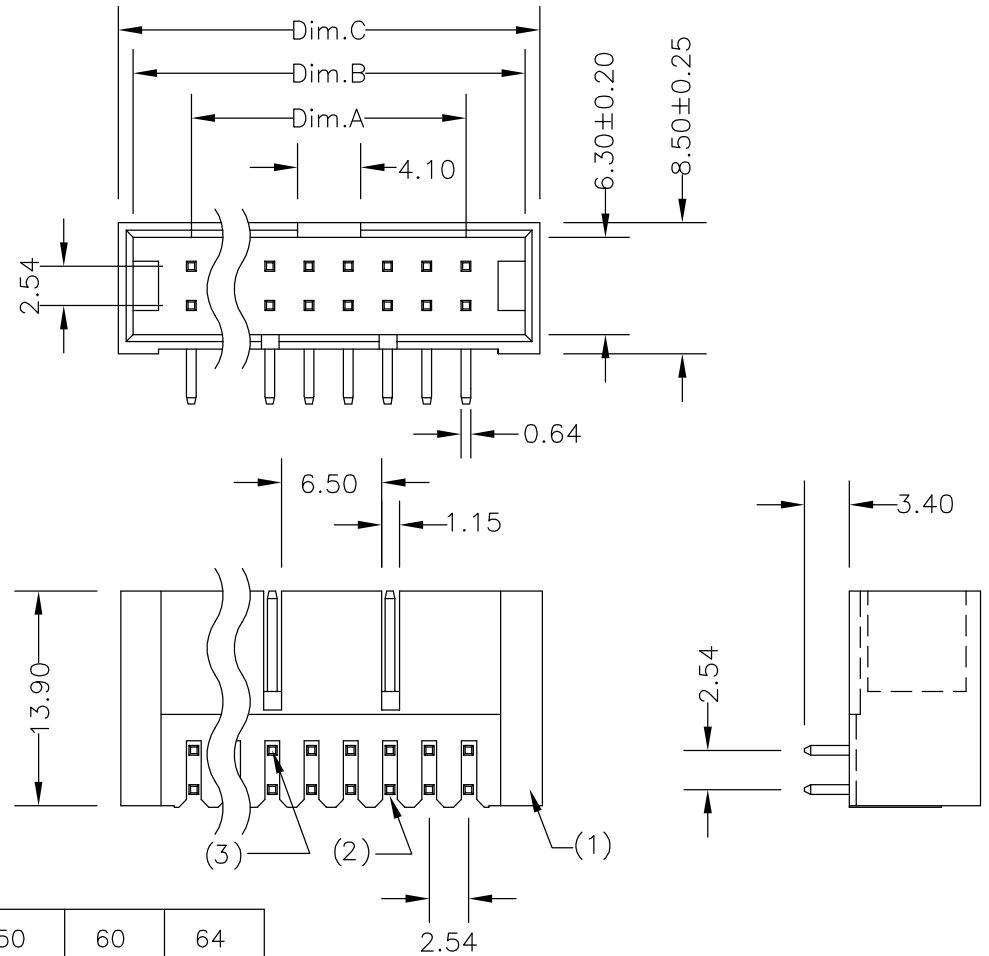

編號	長度	材質	電鍍	數量
(1)		PBT+30%		1
(2)	0.64X20.76MM	黃銅	錫	5~32
(3)	0.64X16.0MM	黃銅	錫	5~32

Circuits Dimension	10	14	16	20	26	30	34	40	50	60	64
	Dim.A ± 0.25	.400 10.16	.600 15.24	.700 17.78	.900 22.86	1.200 30.48	1.400 35.56	1.600 40.64	1.900 48.26	2.400 60.96	2.900 73.66
Dim.B ± 0.25	.700 17.76	.900 22.84	1.000 25.38	1.200 30.48	1.500 38.08	1.700 43.16	1.900 48.24	2.200 55.85	2.700 68.56	3.200 81.26	3.400 86.34
Dim.C ± 0.25	.774 19.66	.974 24.74	1.074 27.28	1.274 32.36	1.574 39.98	1.774 45.05	1.974 50.12	2.274 58.56	2.774 70.45	3.274 83.16	3.474 88.24

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ±

CHECKED BY GENIUS

.X ±

UNIT / mm SCALE 1:1

.XX ±

DATE

.XXX ±

ANG ±

SIZE A4 PROJECTION



照片框

ORDER INFORMATION

B-R13-xx-LF
SERIES | LEADFREE
10-64WAY
LONG 13.9mm
DIP 90°

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: