



RECOMMENDED PCB LAYOUT

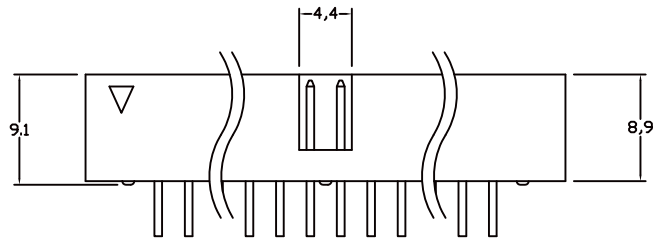

**SPECIFICATIONS:**

**Material:**

Insulator :PBT , glass rated UL 94V-0

Insulator Color :Black

Contacts: Brass

Contact Plating :Gold Flash over Nickel underplate on contact area. Tin over copper underplate on solder tails.

**Electrical:**

Operating voltage: 250V AC max

Current rating: 1 Amp max

Contact resistance: 20 mohms max

Insulation resistance: 5,000 Mohms min

Dielectric withstanding voltage: 1,000 VAC / minute

**Mechanical:**

Mating durability: 500 cycles min

Temperature Rating:

Operating temperatures: -55 to +105

$A = 2.54 \times \text{No. of positions} / 2 + 7.6$

$B = 2.54 \times \text{No. of positions} / 2 + 5.08$

$C = 2.54 \times \text{No. of spaces}$

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

X. ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1

.XX ±

DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION

照片框

**ORDER INFORMATION**

B-RS01-xx-LF  
SERIES | LEADFREE  
06-64WAY  
SEMI GOLD 1u"  
DIP 90°

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: