


**MATERIALS**

- 1. HOUSING : NYLON 6T (UL 94V-0),BLACK.
- 2. TERMINAL : S.Q. 0.64mm BRASS, GOLD PLATING.

**SPECIFICATION**

- 1. CURRENT RATING : 3 AMP.MAX.
- 2. DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC R.M.S. FOR ONE MINUTE.
- 3. INSULATION RESISTANCE : 5000M OHMS MIN. AT 1000V DC.
- 4. OPERATING TEMPERATURE : -55°C TO +105°C.
- 5. MAX. PROCESSING TEMPERATURE : 230°C FOR 30~60 SECONDS.

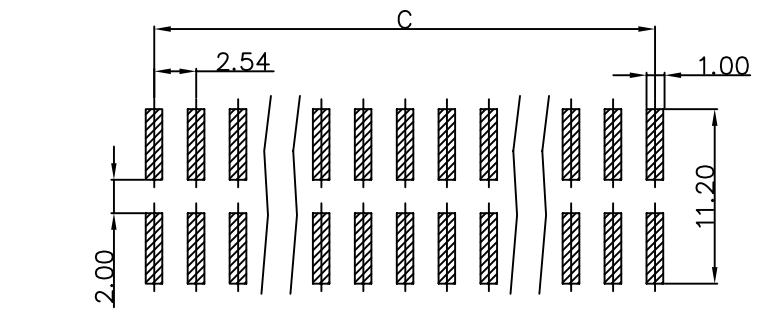

RECOMMEND P.C.B. LAYOUT  
TOP VIEW

NUMBER OF POSITION	DIMENSIONS			NUMBER OF POSITION	DIMENSIONS		
	A	B	C		A	B	C
6	15.24	12.94	5.08	26	40.64	38.34	30.48
8	17.78	15.48	7.62	30	45.72	43.42	35.56
10	20.32	18.02	12.70	34	50.80	48.50	40.64
12	22.86	20.56	15.24	40	58.42	56.12	48.26
14	25.40	23.10	15.24	44	63.50	61.20	53.34
16	27.94	25.64	17.78	50	71.12	68.82	60.96
20	33.02	30.72	22.86	60	83.82	81.52	73.66
24	38.10	35.80	27.94	64	88.90	86.60	78.74

**RoHS Compliant**

TOLERANCES ARE



DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

- X. ±
- .X ±
- .XX ±
- .XXX ±
- ANG ±


PJECTION

煜倫股份有限公司

www.morethanall.com



**ORDER INFORMATION**



DESCRIPTION: