
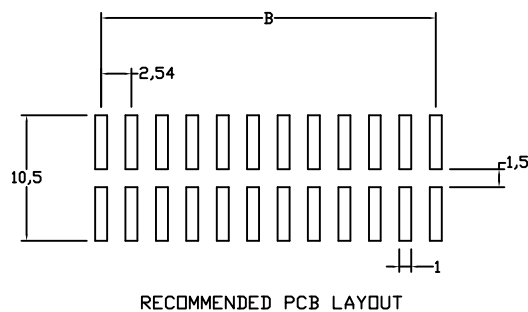


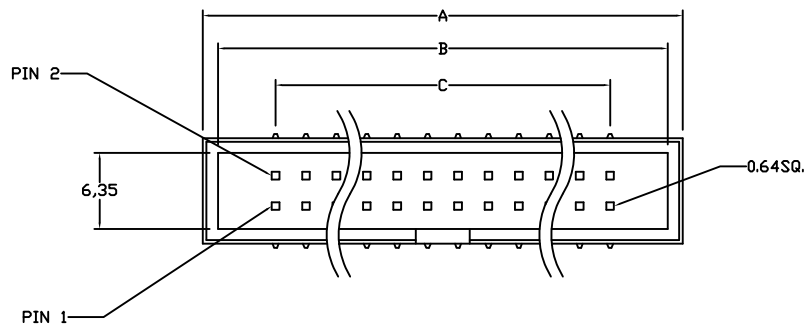

SPECIFICATIONS:

Material:

Insulator: HI-Temp Nylon 6T, rated UL-94V-0

Contacts: Brass

Contact Plating:

Gold flash over Nickel underplate overall

Electrical:

Operating voltage: 250V AC max

Current rating: 1 Amp max

Contact resistance: 20 mohms max

Insulation resistance: 5,000 Mohms min

Dielectric withstanding voltage: 1,000 VAC / minute

Mechanical:

Mating durability: 500 cycles min

Temperature Rating:



Operating temperatures: -55 to +105

Recommended Soldering temp: 250 for 10 second

$$A = 2.54 \times \text{No. of positions} / 2 + 7.6$$

$$B = 2.54 \times \text{No. of positions} / 2 + 5.08$$

$$C = 2.54 \times \text{No. of spaces}$$

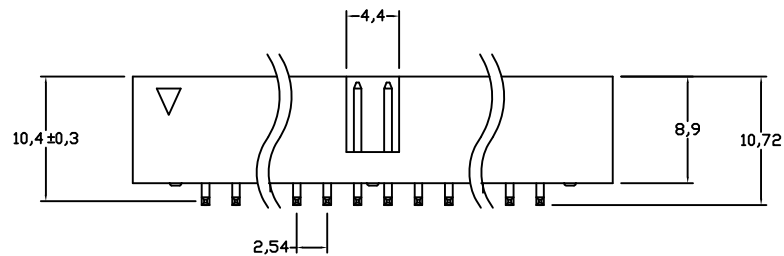

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

照片框

ORDER INFORMATION


B-V116XCR-xx-LF
SERIES
180°SMT
REEL
CAP
NON POST
WIDTH 11.6mm
LEADFREE
06-64WAY

DESCRIPTION:



-
- A diagram of a trapezoidal container. A vertical red dashed line represents the centerline. Two blue lines extend from the top edge of the container, forming an angle of 15° with the centerline. A horizontal blue line segment is drawn at the top, with a 3° angle indicated between it and the vertical centerline.

SECTION B-B

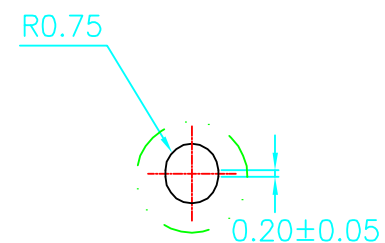

DETAIL: "A"(S=5/1)

照片框

ORDER INFORMATION

B-V116XCR-xx-LF

SERIES

180°SMT

REEL

CAP

NON POST

WIDTH 11.6mm

LEADFREE

06~64WAY