



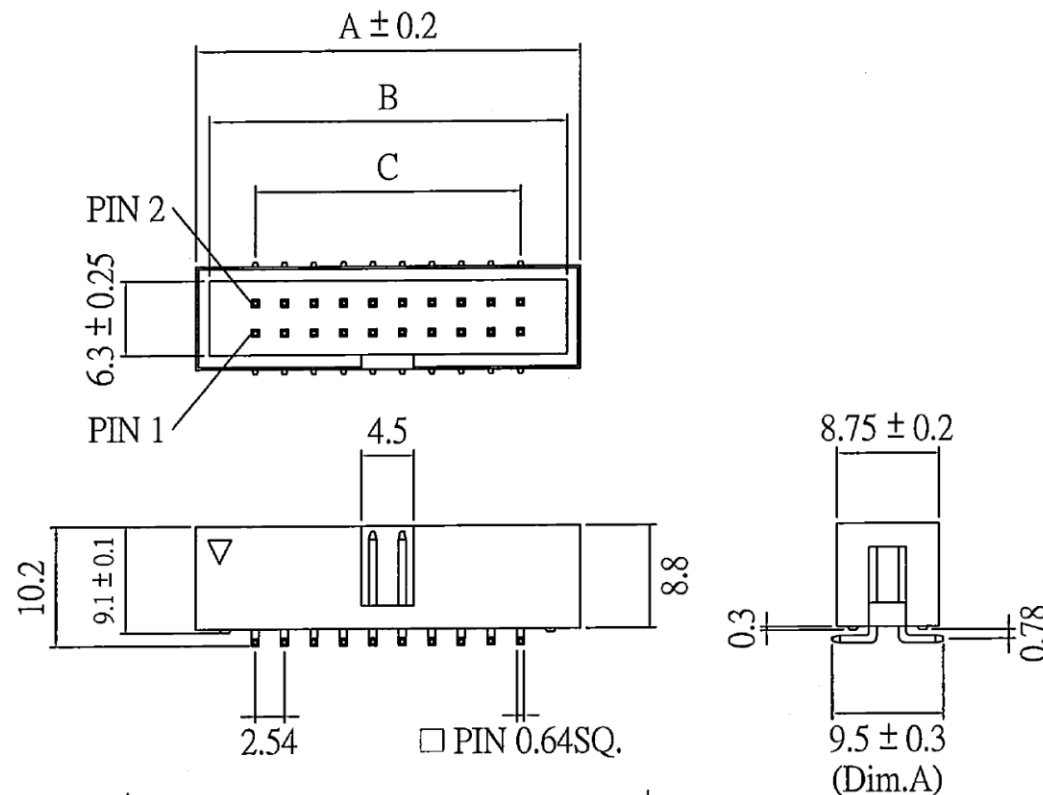

↓ Recommended PCB Layout ↓

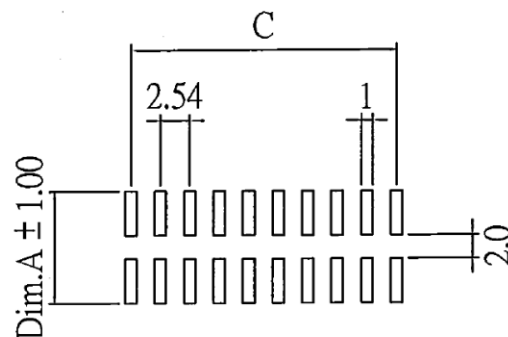

SPECIFICATIONS:

Material:

Insulator: HI-Temp Nylon 6T, rated UL-94V-0

Contacts: Brass

Contact Plating: Gold flash over Nickel underplate overall

Electrical:

Operating voltage: 250V AC max

Current rating: 1 Amp max

Contact resistance: 20 mohms max

Insulation resistance: 5,000 Mohms min

Dielectric withstanding voltage: 1,000 VAC / minute

Mechanical: Mating durability: 500 cycles min

Temperature Rating: Operating temperatures: -55 to +105

Lead free, RoHS compliant

Recommended soldering temp: 250 for 10 second

ROHS Compliant			
Cir-cuits	Dimension mm		
	A	B	C
2×3	15.24	12.94	5.08
2×4	17.78	15.48	7.62
2×5	20.32	18.02	10.16
2×6	22.86	20.56	12.70
2×7	25.40	23.10	15.24
2×8	27.94	25.64	17.78
2×10	33.02	30.72	22.86
2×12	38.10	35.80	27.94
2×13	40.64	38.34	30.48
2×15	45.72	43.42	35.56
2×17	50.80	48.50	40.64
2×20	58.42	56.12	48.26
2×22	63.5	61.20	53.34
2×25	71.12	68.82	60.96

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±

.X ±

.XX ±

.XXX ±



ANG ±

照片框

ORDER INFORMATION


B-VCR-xx-LF
SERIES REEL CAP 180°SMT
LEADFREE 06-50WAY

DESCRIPTION:

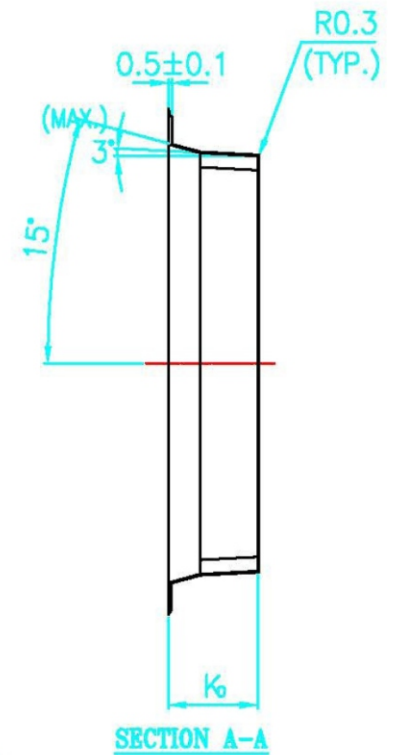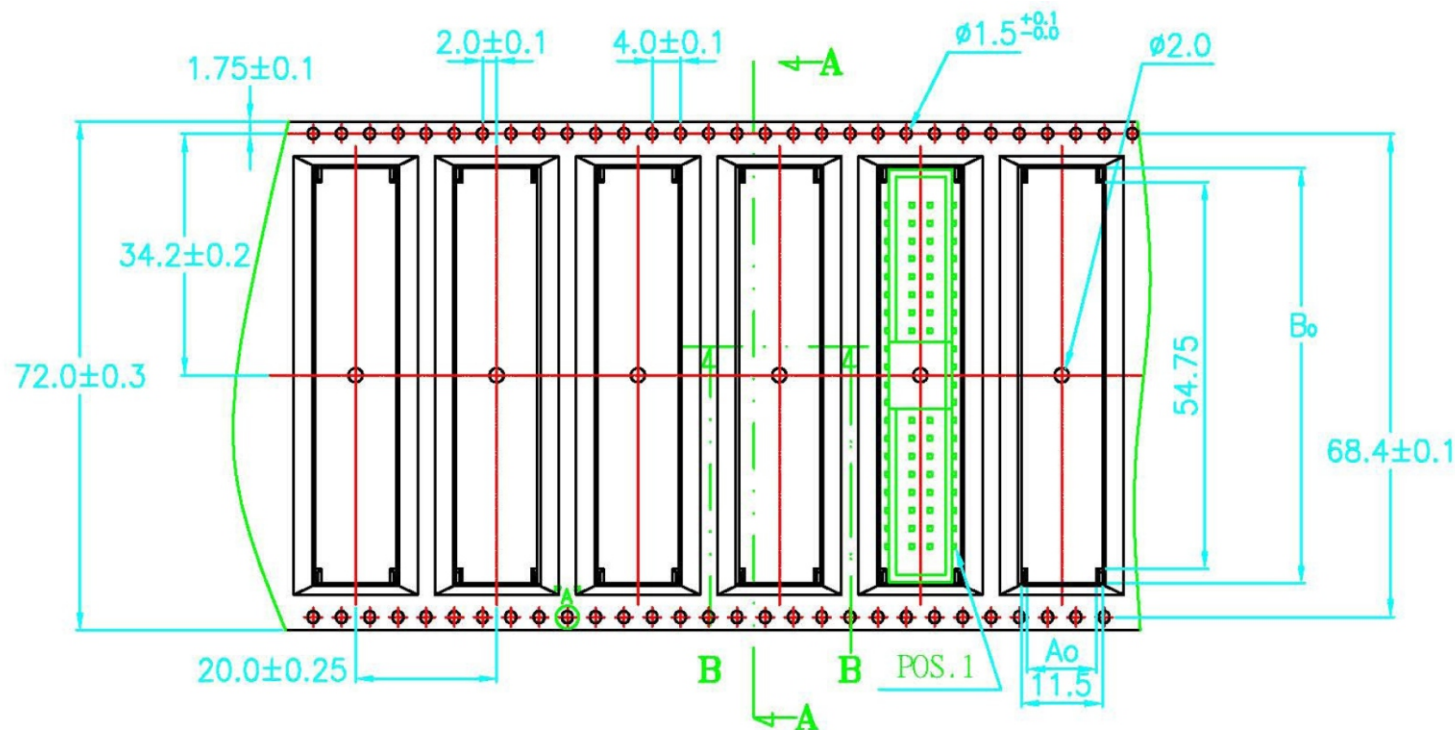

FEEDING DIRECTION →

1. 10 sprocket hole pitch cumulative tolerance $\pm 0.20\text{mm}$.
2. Carrier camber not to exceed 1mm in 100mm.
3. A and B measured on a plane 0.3mm above the bottom of the pocket.
4. K measured from a plane on the inside bottom of the pocket to the top surface of the carrier.
5. All dimensions meet EIA-481-4 requirements.
6. Material: Black Anti-Static Polystyrene.
7. Component load per 13" reel : 250 pcs. 13"=5.4M B:8 A:12

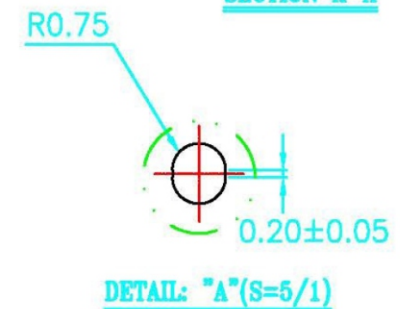

ITEM	DIM
A0	$9.8^{+0.10}_{-0.10}$
B0	$58.75^{+0.10}_{-0.10}$
K0	$12.65^{+0.10}_{-0.10}$

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$

.X $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

B-VCR-xx-LF
SERIES REEL CAP 180°SMT
LEADFREE
06-50WAY

DESCRIPTION: