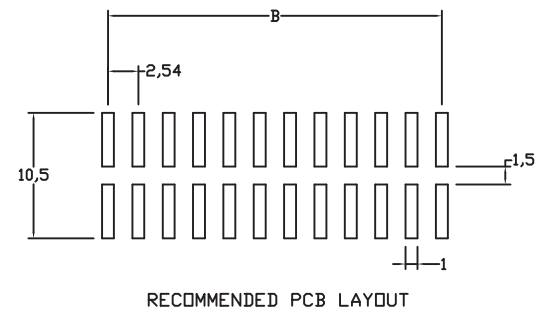
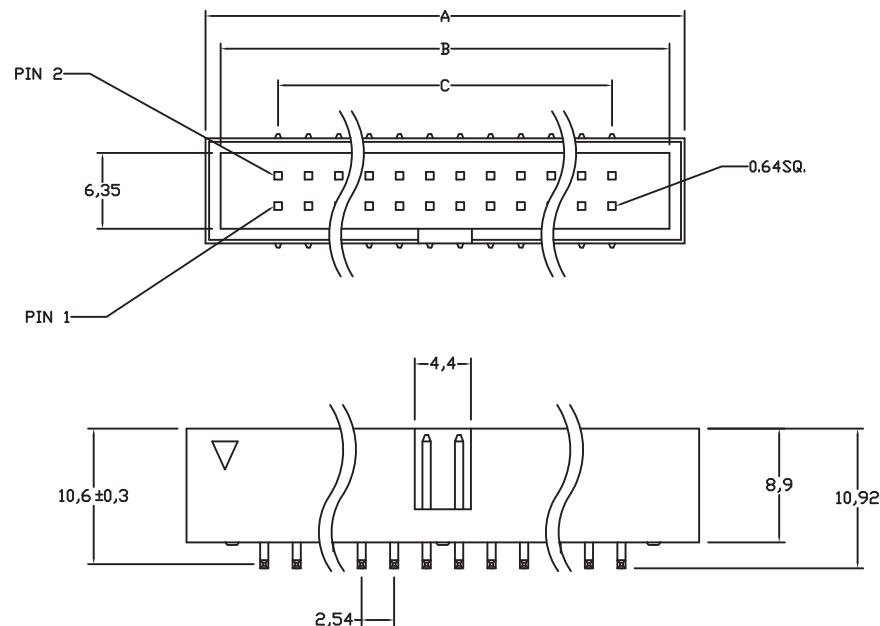


SPECIFICATIONS:

Material:

Insulator: Hi-Temp Nylon 6T, rated UL-94V-0

Contacts: Brass

Contact Plating:

Gold Flash over Nickel underplate on contact area. Tin over copper underplate on solder tails.

Electrical:

Operating voltage: 250V AC max

Current rating: 1 Amp max

Contact resistance: 20 mohms max

Insulation resistance: 5,000 Mohms min

Dielectric withstanding voltage: 1,000 VAC / minute

Mechanical:

Mating durability: 500 cycles min

Temperature Rating:

Operating temperatures: -55 to +105

Recommended Soldering temp : 250 for 10 second

A = 2.54 X No. of positions / 2 + 7.6
B = 2.54 X No. of positions / 2 + 5.08
C = 2.54 X No. of spaces

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±



PPOJECTION

照片框

ORDER INFORMATION


B-VS01CR-xx-LF
SERIES REEL CAP SEMI GOLD 1u"
180°SMT
LEADFREE
06~50WAY

DESCRIPTION:

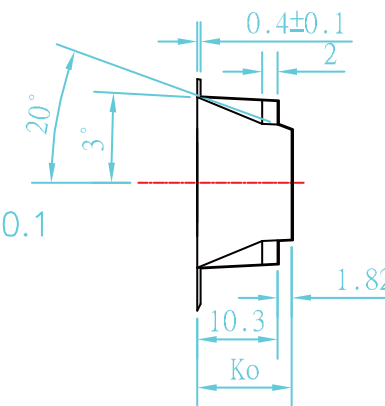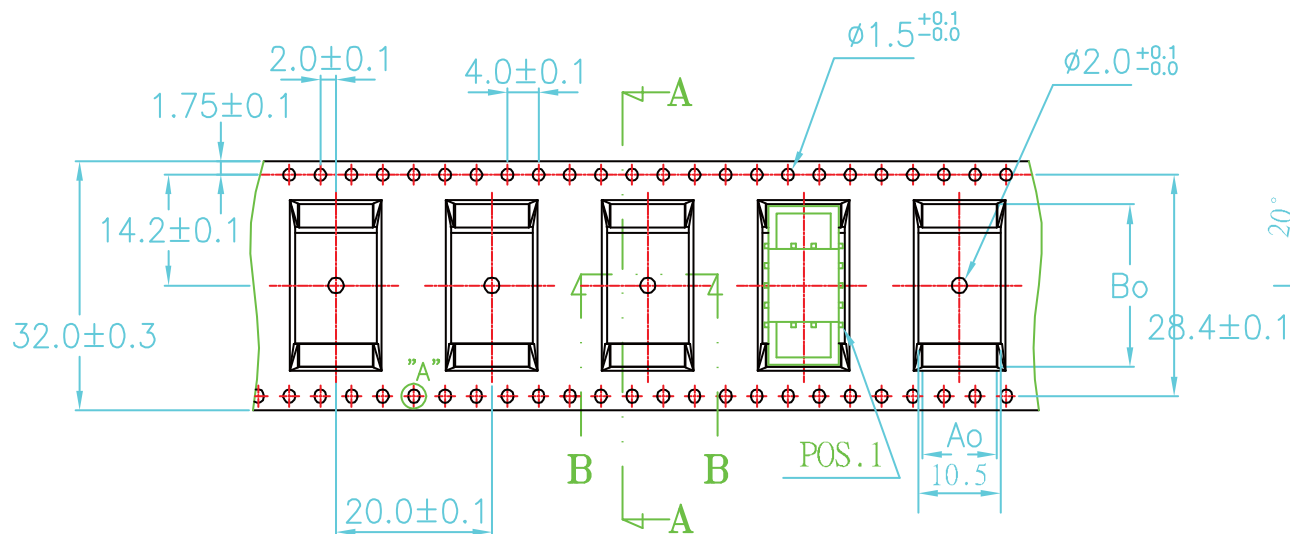

SECTION A-A

FEEDING DIRECTION →



SECTION B-B

1. 10 sprocket hole pitch cumulative tolerance $\pm 0.20\text{mm}$.
2. Carrier camber not to exceed 1mm in 100mm.
3. A_0 and B_0 measured on a plane 0.3mm above the bottom of the pocket.
4. K_0 measured from a plane on the inside bottom of the pocket to the top surface of the carrier.
5. All dimensions meet EIA-481-2 requirements.
6. Material: Black Anti-Static Polystyrene.
7. Component load per 13" reel : 250 pcs.

照片框

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

ORDER INFORMATION

B-VS01CR-xx-LF
SERIES REEL CAP SEMI GOLD 1u"
180°SMT
LEADFREE
06~50WAY

DESCRIPTION: